
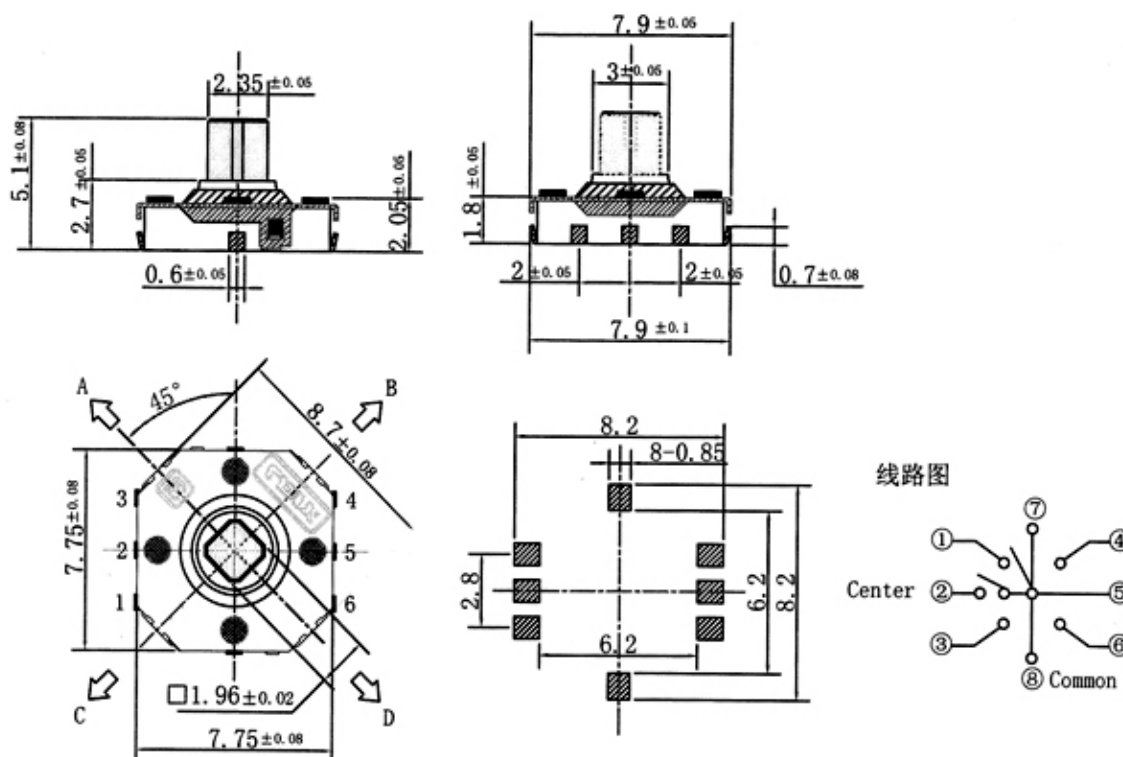


KLSelectronic
www.cnkls.com

KLS7-MT-01/7.0MM SMD

Rating: 100mA / 12V DC
Size 7.0MM SMD / 4 directions + center push
Insulation resistance: 100MΩ min. 100V DC
Contact resistance: 500MΩ max.
Withstand Voltage: AC 250V (50Hz) / Min
Ambient Temp. Used : -10°C to +60°C
Mechanical Life: 100,000 Cycles
Operating force: 4 direction 160±50 gf / center push 280±100 gf
Travel: 4 direction 0.20±0.1mm / center push 0.15±0.1 gf

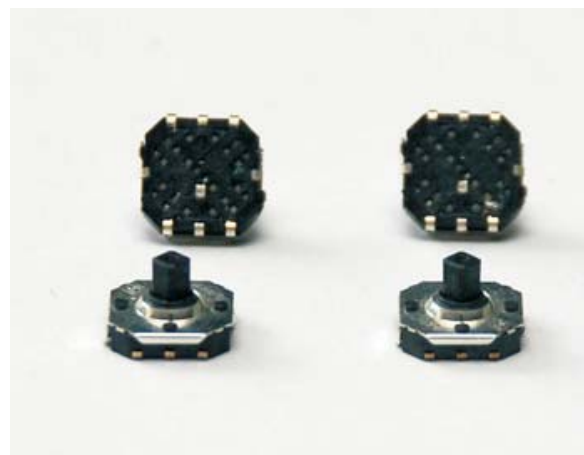

ORDER INFORMATION

DIP Switch Series

KLS7-MT-03/10MM DIP

SPECIFICATIONS

Rating: 50mA / 12V DC

Size 10MM DIP / 4 directions + center push/ Height 10.0mm

Insulation resistance: 500M Ω min. 100V DC

Contact resistance: 500M Ω max.



Withstand Voltage: AC 250V (50Hz) / Min

Ambient Temper.Used : -10°C to +60°C

Mechanical Life: 100,000 times

Operating force: 4 direction 160 $\pm$ 50 gf / center push 320 $\pm$ 100 gf

Travel: 4 direction 0.25 $\pm$ 0.1mm / center push 0.15 $\pm$ 0.1 gf

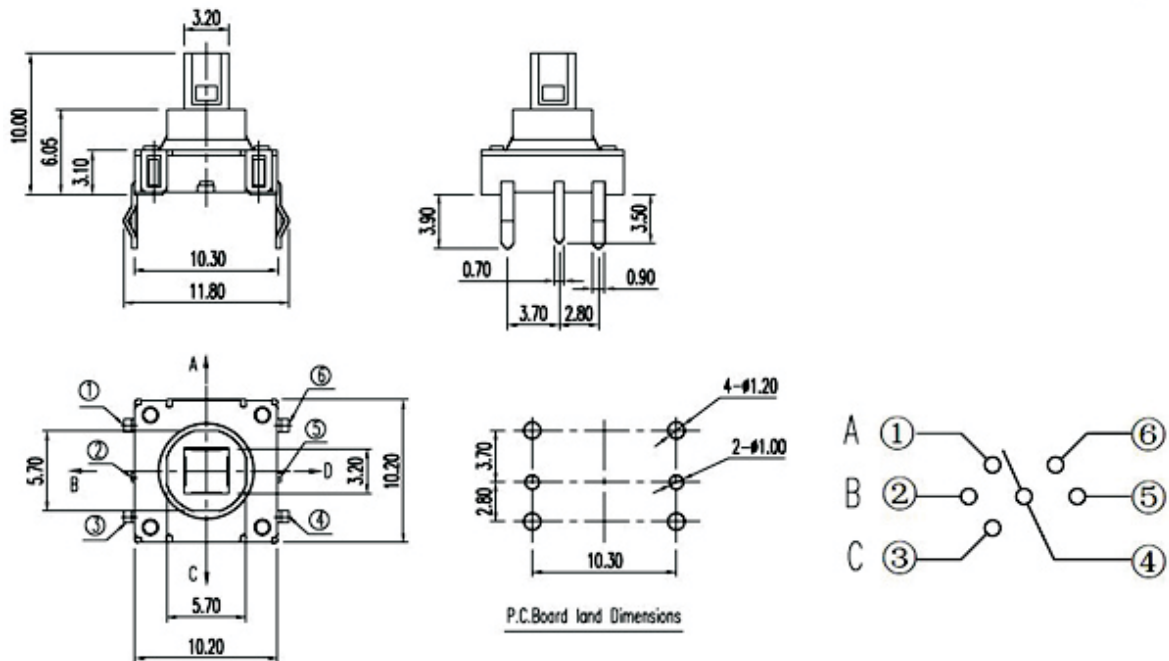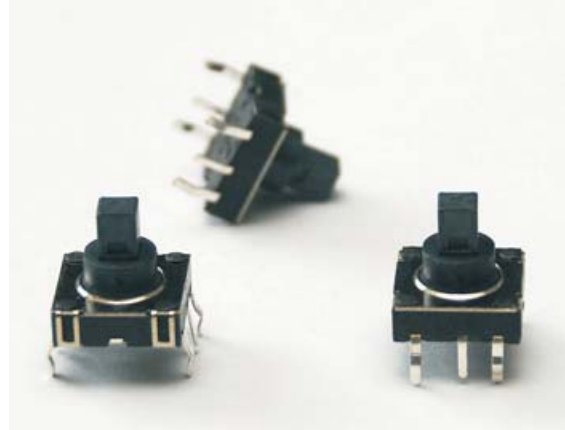

ORDER INFORMATION

Switch

DIP Switch Series

KLS7-MT-06/10MM SMD

SPECIFICATIONS

KLS7-MT-06-10.0: Size 10mm SMD / 4 directions + center push / Height 10.0mm

Rating: 50mA / 12V DC

Insulation resistance: 500M Ω min. 100V DC

Contact resistance: 500M Ω max.






Withstand Voltage: AC 250V (50Hz) / Min

Ambient Temper. Used : -10°C to +60°C

Mechanical Life: 100,000 times

Operating force: 4 direction 160 50 gf / center push 350 100 gf

Travel : 4 direction 0.25 $\pm$ 0.1mm / center push 0.15 $\pm$ 0.1 gf

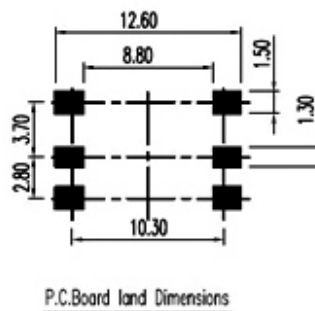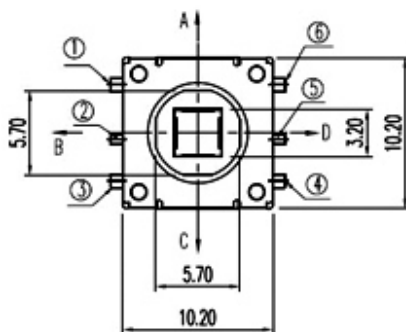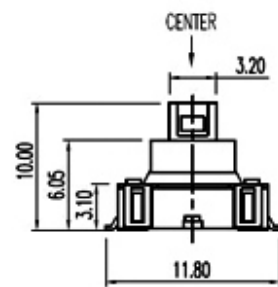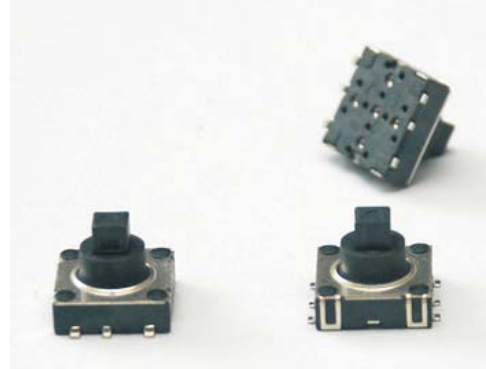

ORDER INFORMATION

Switch

DIP Switch Series

KLS7-MT-05/10MM SMD

SPECIFICATIONS

KLS7-MT-05-5.0: Size 10mm SMD / 4 directions + center push / Height 5.0mm

KLS7-MT-05-9.0: Size 10mm SMD / 4 directions + center push / Height 9.0mm

Rating: 100mA / 12V DC

Insulation resistance: 500MΩ min. 100V DC

Contact resistance: 500MΩ max.



Withstand Voltage: AC 250V (50Hz) / Min

Ambient Temper.Used : -10°C to +60°C

Mechanical Life: 100,000 times

Operating force: 4 direction 160 50 gf / center push 250 100 gf

Travel : 4 direction 0.25±0.1mm / center push 0.15±0.1 gf

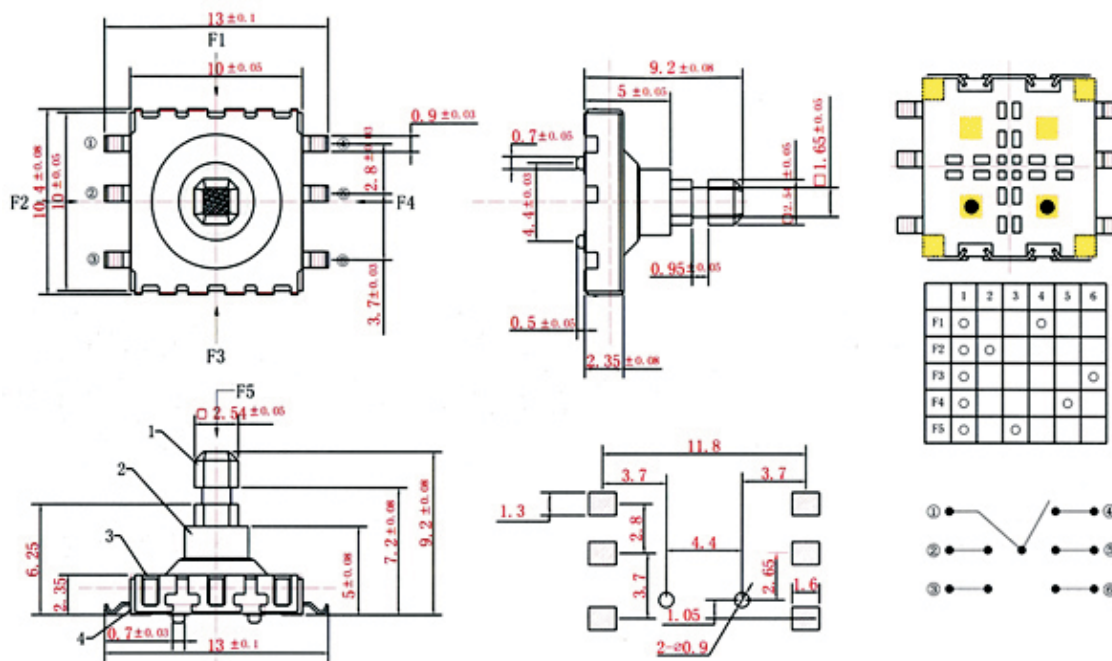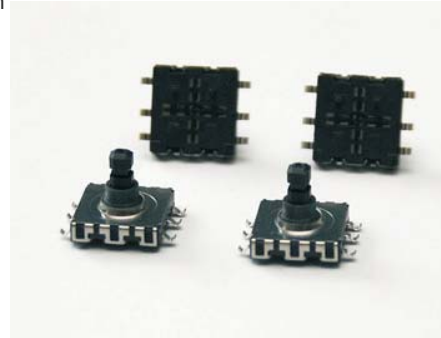

ORDER INFORMATION

Switch

DIP Switch Series

KLS7-MT-07/10MM SMD 10 contacts

SPECIFICATIONS

KLS7-MT-07-5.0: Size 10mm SMD / 4 directions + center push / Height 5.0mm

KLS7-MT-07-9.0: Size 10mm SMD / 4 directions + center push / Height 9.0mm

Rating: 100mA / 12V DC

Insulation resistance: 500MΩ min. 100V DC

Contact resistance: 500MΩ max.



Withstand Voltage: AC 250V (50Hz) / Min

Ambient Temper. Used : -10°C to +60°C

Mechanical Life: 100,000 times

Operating force: 4 direction 160 50 gf / center push 250 100 gf

Travel : 4 direction 0.25±0.1mm / center push 0.15±0.1 gf

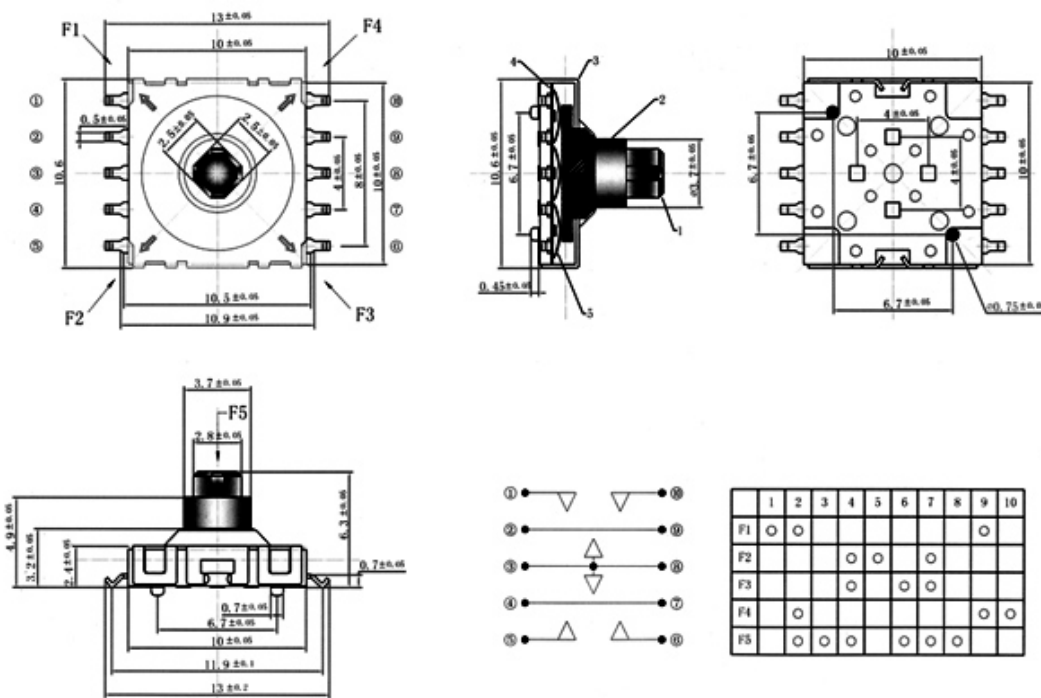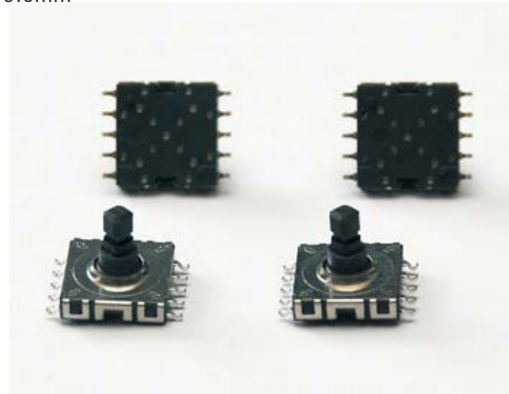

ORDER INFORMATION

Switch

DIP Switch Series

KLS7-MT-08/10MM SMD Flat knob

SPECIFICATIONS

KLS7-MT-08: Size 10mm SMD Flat knob / 4 directions + center push

Rating: 100mA / 12V DC

Insulation resistance: 500MΩ min. 100V DC

Contact resistance: 500MΩ max.



Withstand Voltage: AC 250V (50Hz) / Min

Ambient Temper. Used : -10°C to +60°C

Mechanical Life: 100,000 times

Operating force: 4 direction 160 50 gf / center push 250 100 gf

Travel : 4 direction 0.25±0.1mm / center push 0.15±0.1 gf

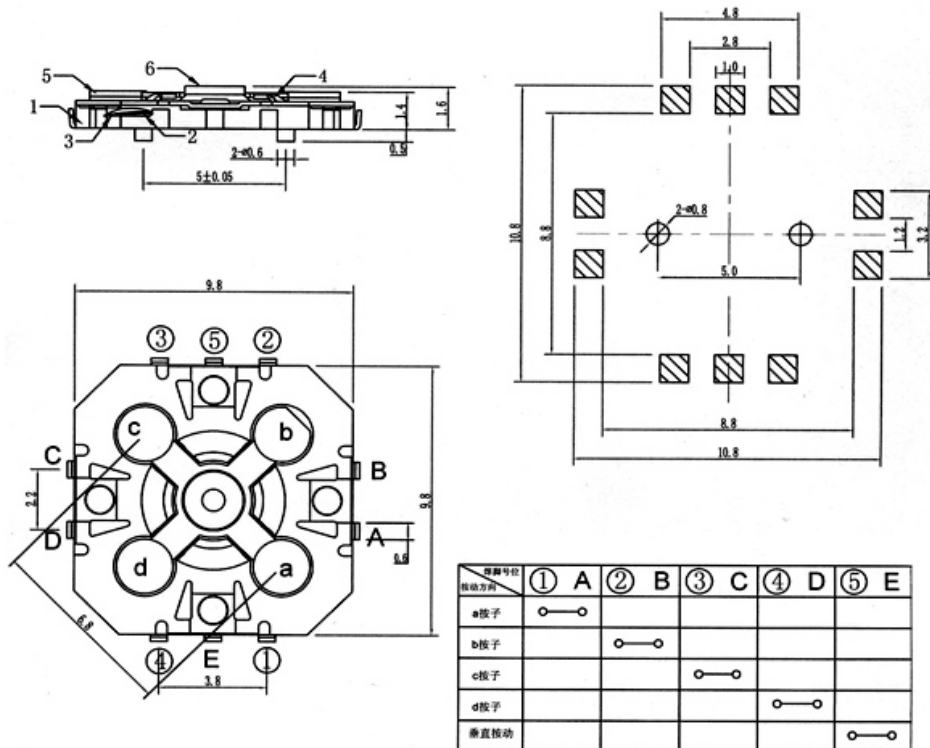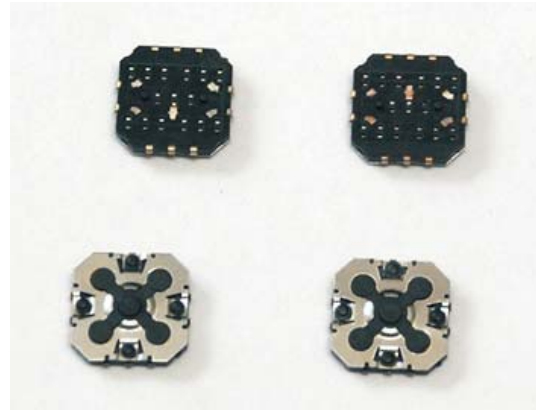

ORDER INFORMATION