



KLS

3-Buttons,Switches-Компоненты коммутации: выключатели, переключатели, кнопки

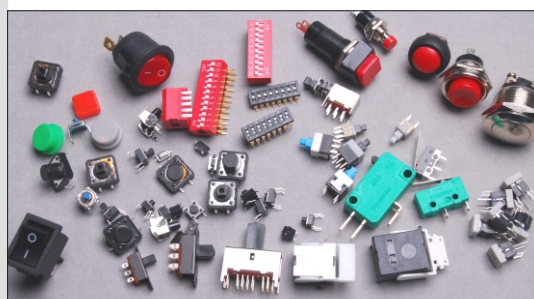

- 3-1 DIP switch
- 3-2 Tactile switch
- 3-3 **Hook switch**
- 3-4 Magnetic reed switches
- 3-5 Snap Action switches/Micro switches
- 3-6 Navigation joystick switches
- 3-7 Pushbutton switches
- 3-8 Rocker switches
- 3-9 Rotary switches
- 3-10 Slide switches

More . . . 

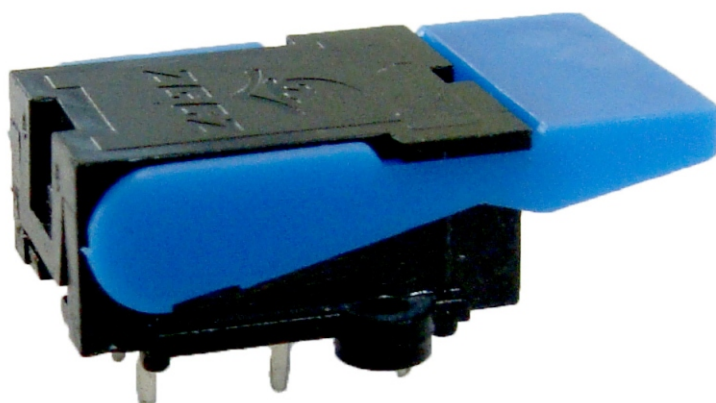

Switch

DIP Switch Series

KLS7-HS12L01/1P2T

Specification:

TITLE HOOK SWITCH
KLS P/N: KLS7-HS12L01

Rating :0.2A 50V DC

Function:1P2T


Timing: NON-SHORTING

ContactResistance (mohms) :200mΩ max

Insulation Resistanc (Mohms):100mΩ min at 500V DC

Dielectric Strength(V): AC 500V for 1 min

LifeTest:100,000 Cycles

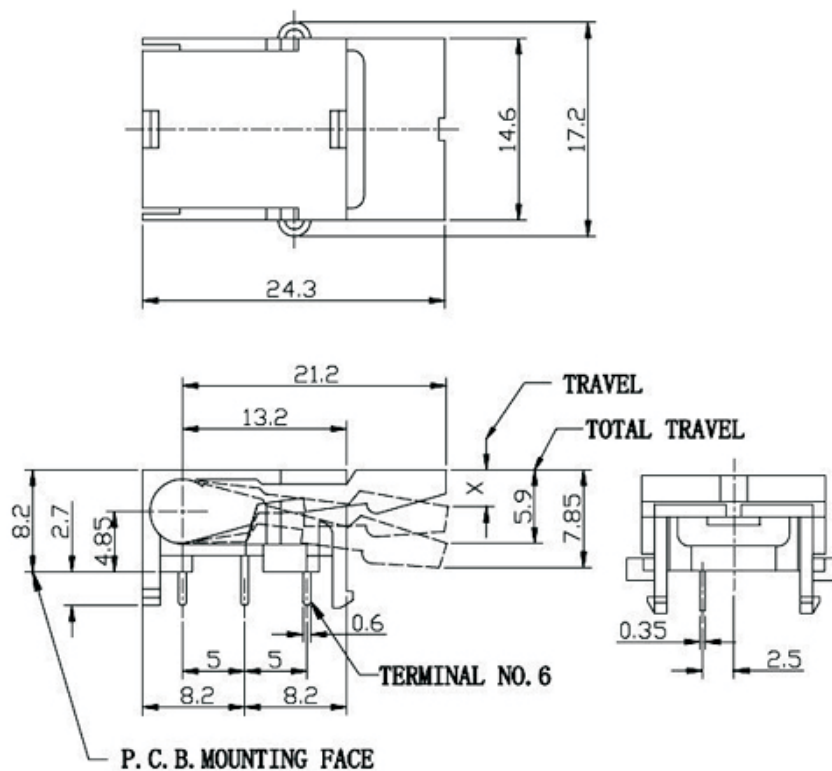

ORDER INFORMATION

Switch

Hook switches series

KLS7-HS12L02/1P2T

Specification:

TITLE HOOK SWITCH

KLS P/N: KLS7-HS12L02

Rating :0.2A 50V DC

Function:1P2T



Timing: NON-SHORTING

ContactResistance (mohms) :200mΩ max



Insulation Resistanc (Mohms):100mΩ min at 500V DC

Dielectric Strength(V): AC 500V for 1 min

LifeTest:100,000 Cycles

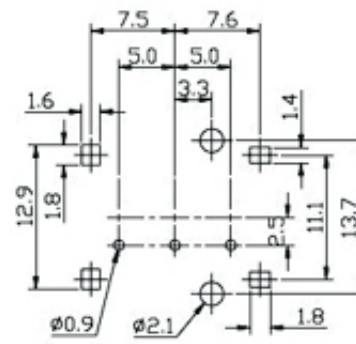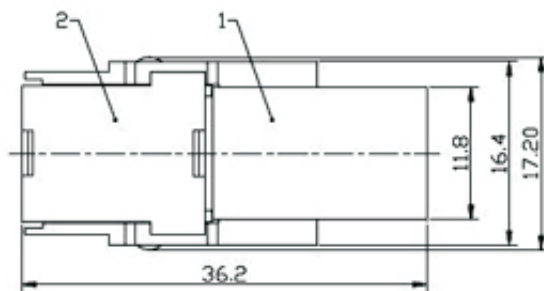

P.C.B. HOLE LAYOUT

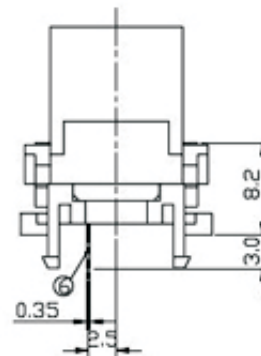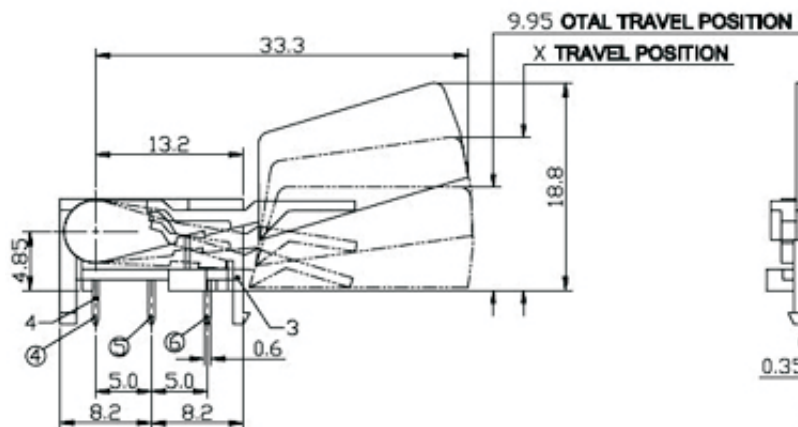

ORDER INFORMATION

Switch

Hook switches series

KLS7-HS12L03/1P2T

Specification:

TITLE HOOK SWITCH

KLS P/N: KLS7-HS12L03

Rating :0.2A 50V DC

Function:1P2T




Timing: NON-SHORTING

ContactResistance (mohms) :200mΩ max

Insulation Resistanc (Mohms):100mΩ min at 500V DC

Dielectric Strength(V): AC 500V for 1 min

LifeTest:100,000 Cycles

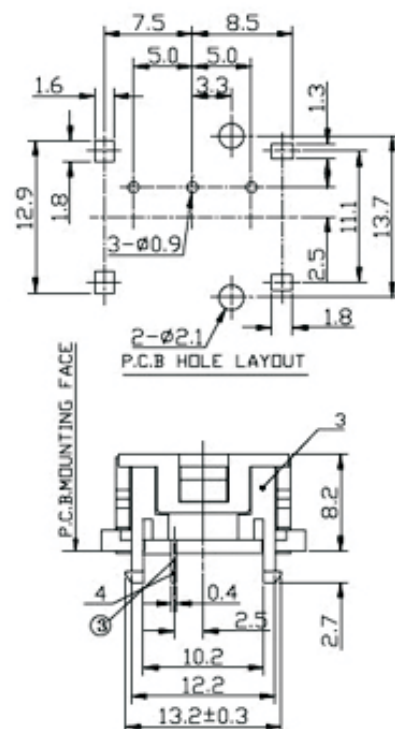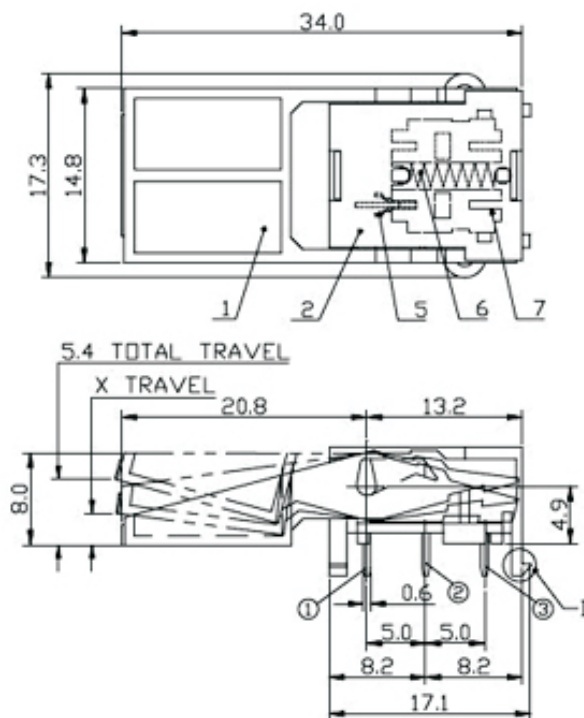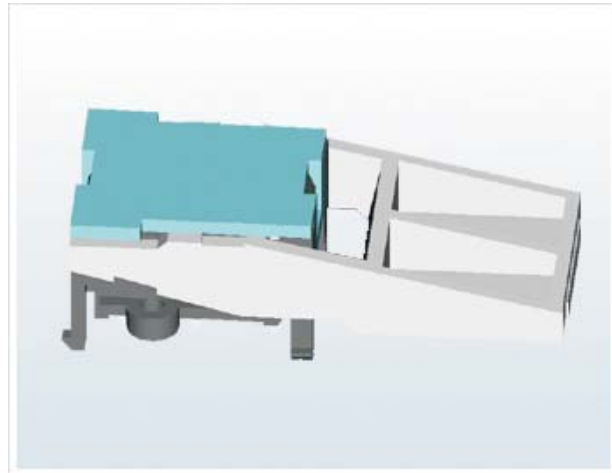

VII

ORDER INFORMATION

Switch

KLSelectronic
www.cnkls.com

Hook switches series

KLS7-HS22L01/2P2T

Specification:

TITLE HOOK SWITCH

KLS P/N: KLS7-HS22L01

Rating :0.2A 50V DC

Function:2P2T




Timing: NON-SHORTING

ContactResistance (mohms) :200mΩ max


Insulation Resistanc (Mohms):100mΩ min at 500V DC

Dielectric Strength(V): AC 500V for 1 min

LifeTest:100,000 Cycles

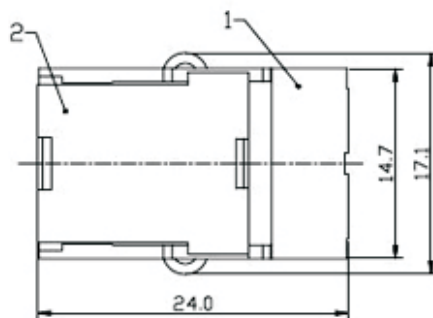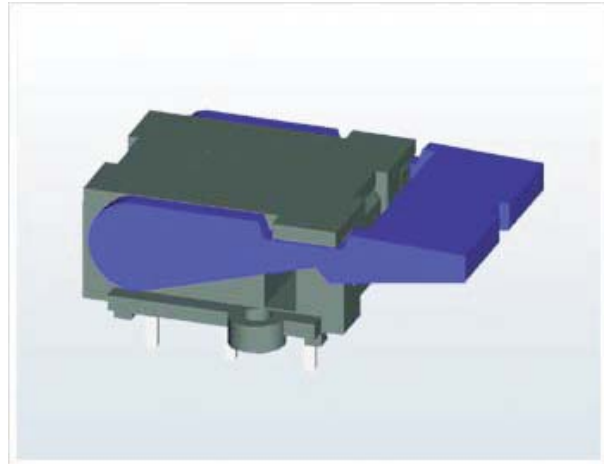

SCHEMATIC

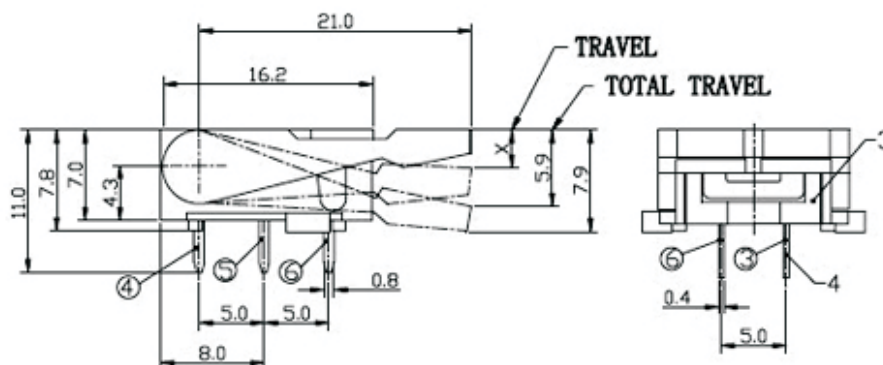

ORDER INFORMATION

Switch

Hook switches series

KLS7-HS22L02/2P2T

Specification:

TITLE HOOK SWITCH

KLS P/N: KLS7-HS22L02

Rating :0.2A 50V DC

Function:2P2T



Timing: NON-SHORTING

ContactResistance (mohms) :200mΩ max

Insulation Resistanc (Mohms):100mΩ min at 500V DC

Dielectric Strength(V): AC 500V for 1 min

LifeTest:100,000 Cycles

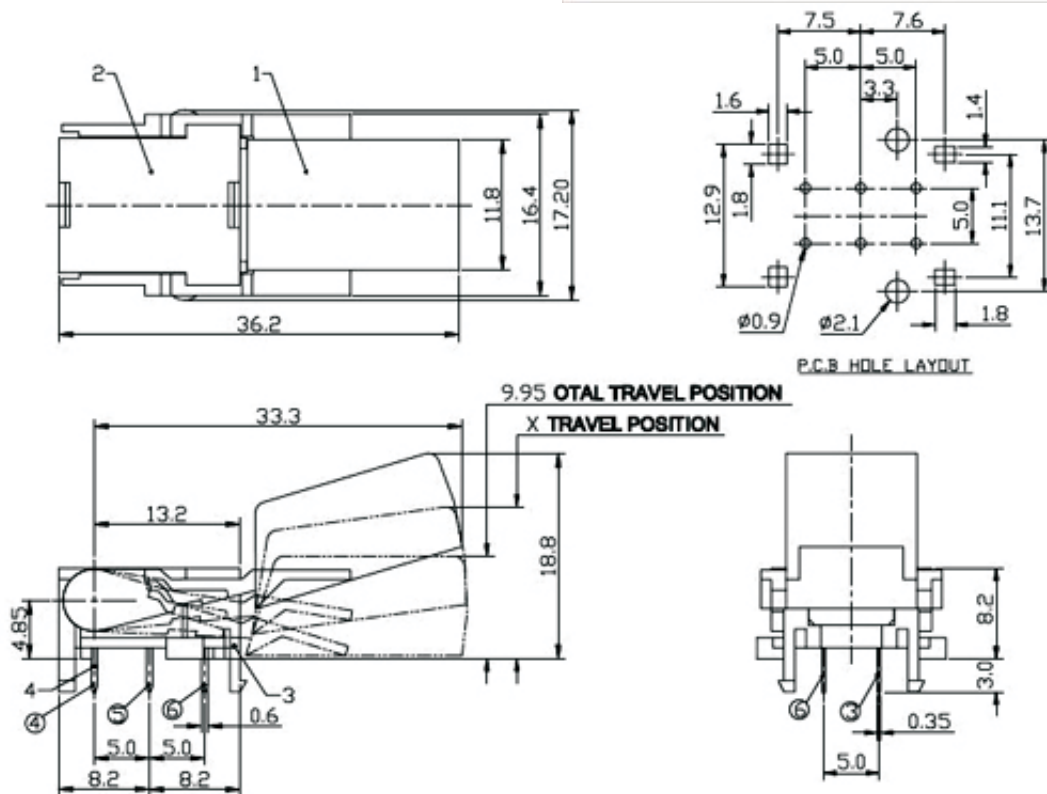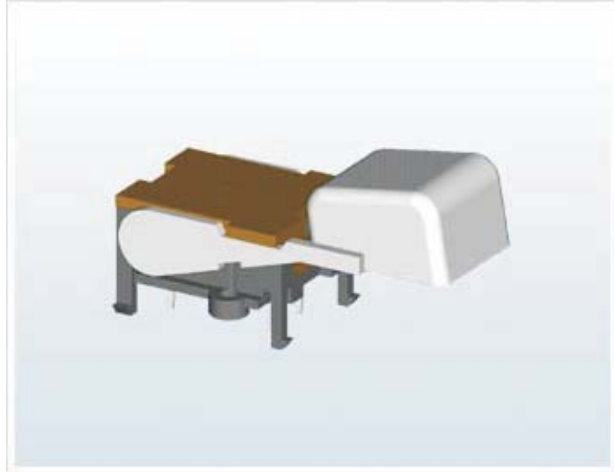

ORDER INFORMATION

Switch

Hook switches series

KLS7-HS22L03/2P2T

Specification:

TITLE HOOK SWITCH
KLS P/N: KLS7-HS22L03

Rating :0.2A 50V DC

Function:2P2T



Timing: NON-SHORTING

ContactResistance (mohms) :200mΩ max

Insulation Resistanc (Mohms):100mΩ min at 500V DC

Dielectric Strength(V): AC 500V for 1 min

LifeTest:100,000 Cycles

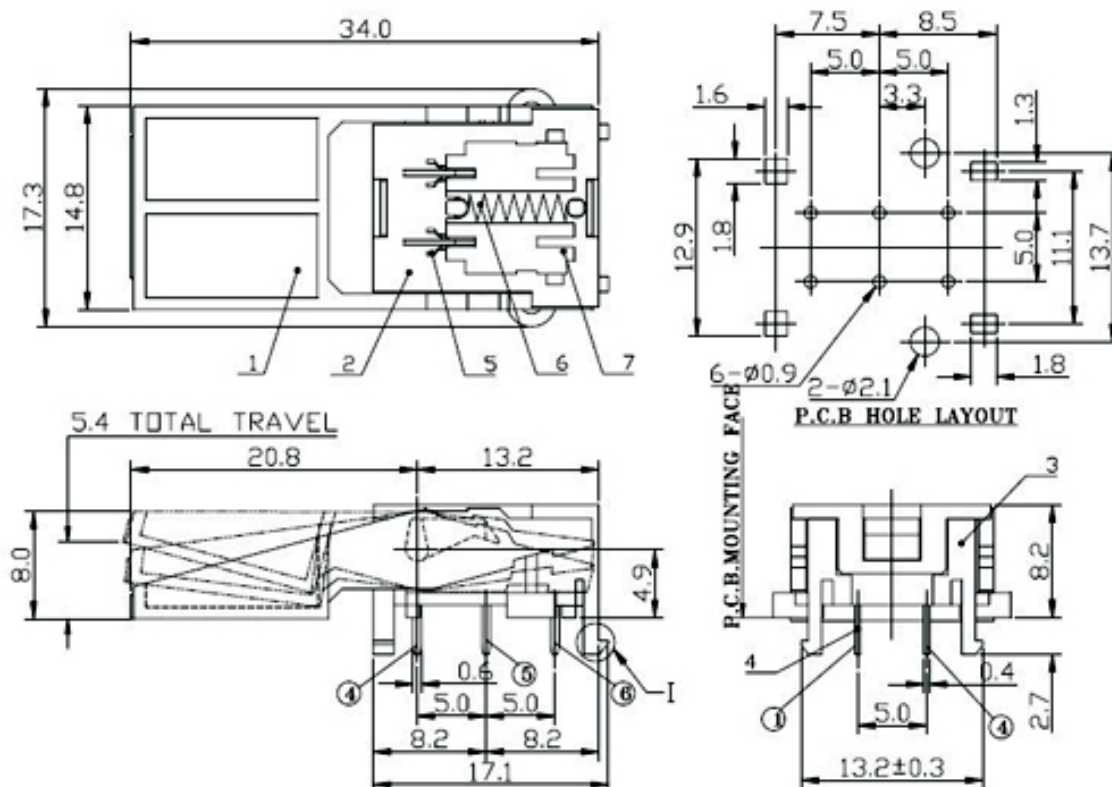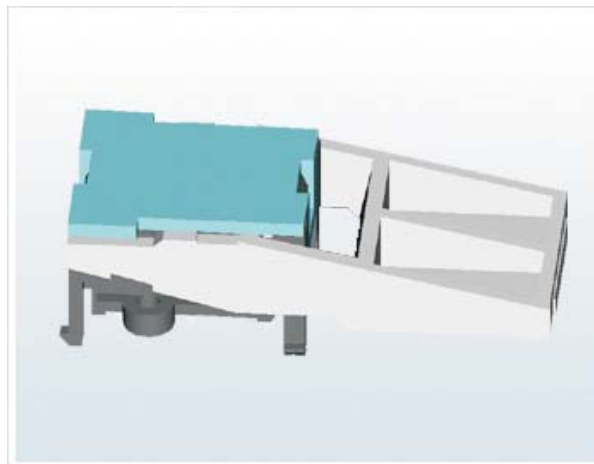

ORDER INFORMATION

Switch

Hook switches series

KLS7-HS22L04/2P2T

Specification:

TITLE HOOK SWITCH

KLS P/N: KLS7-HS22L04

Rating :0.2A 50V DC

Function:2P2T





Timing: NON-SHORTING

ContactResistance (mohms) :200mΩ max

Insulation Resistanc (Mohms):100mΩ min at 500V DC

Dielectric Strength(V): AC 500V for 1 min

LifeTest:100,000 Cycles

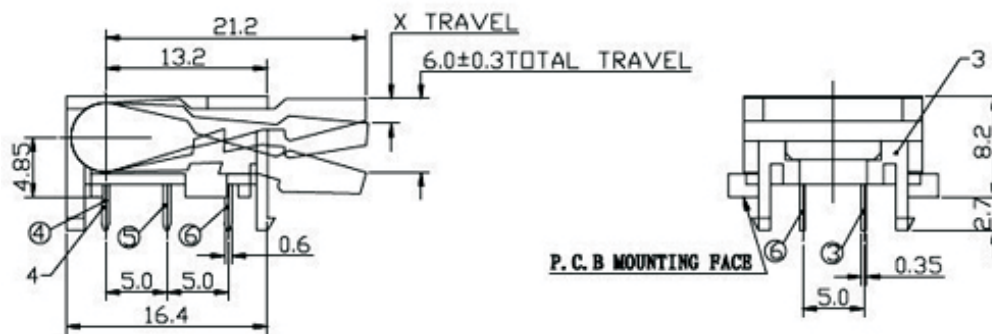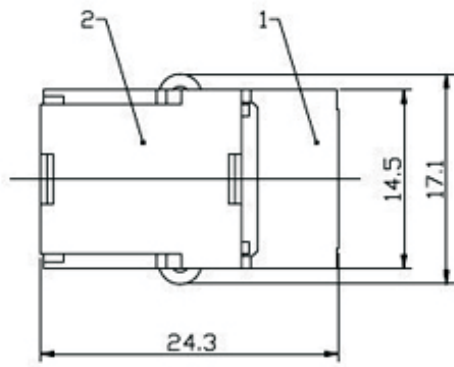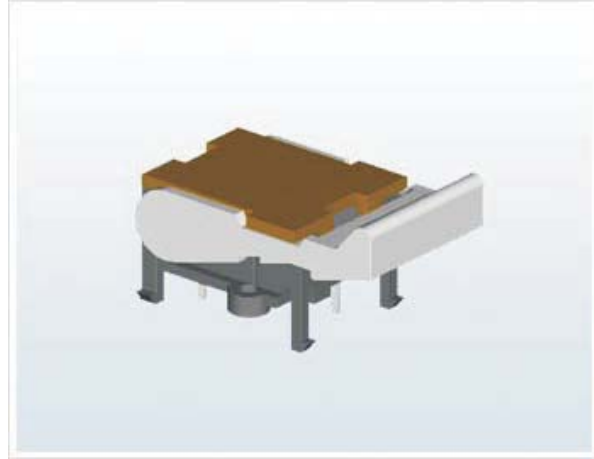

ORDER INFORMATION

Switch

Hook switches series

KLS7-HS22L05/2P2T

Specification:

TITLE HOOK SWITCH
KLS P/N: KLS7-HS22L05

Rating :0.2A 50V DC

Function:2P2T






Timing: NON-SHORTING

ContactResistance (mohms) :200mΩ max

Insulation Resistanc (Mohms):100mΩ min at 500V DC

Dielectric Strength(V): AC 500V for 1 min

LifeTest:100,000 Cycles

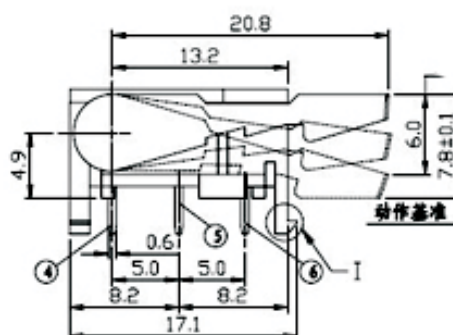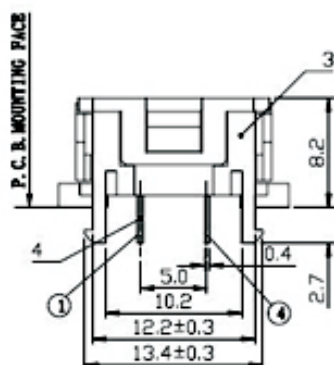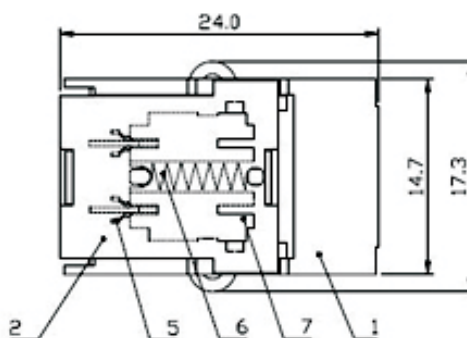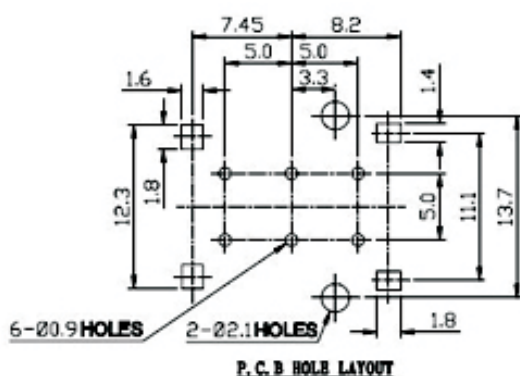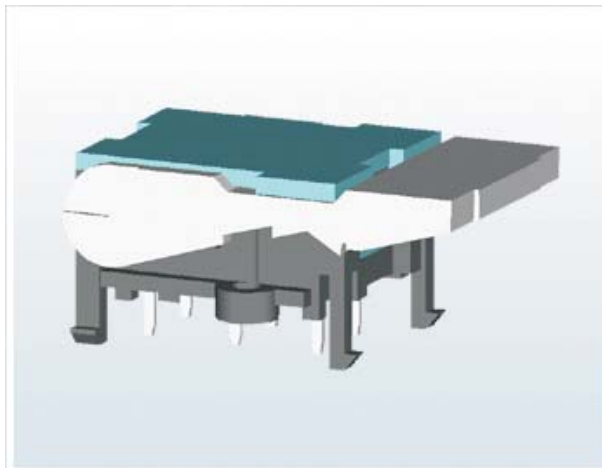

ORDER INFORMATION

Switch

Hook switches series

KLS7-HS22L06/2P2T

Specification:

TITLE HOOK SWITCH
KLS P/N: KLS7-HS22L06

Rating :0.2A 50V DC

Function:2P2T



Timing: NON-SHORTING

ContactResistance (mohms) :200mΩ max


Insulation Resistanc (Mohms):100mΩ min at 500V DC

Dielectric Strength(V): AC 500V for 1 min

LifeTest:100,000 Cycles

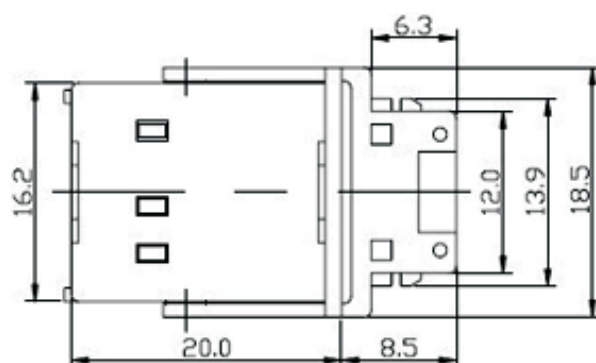

SCHEMATIC

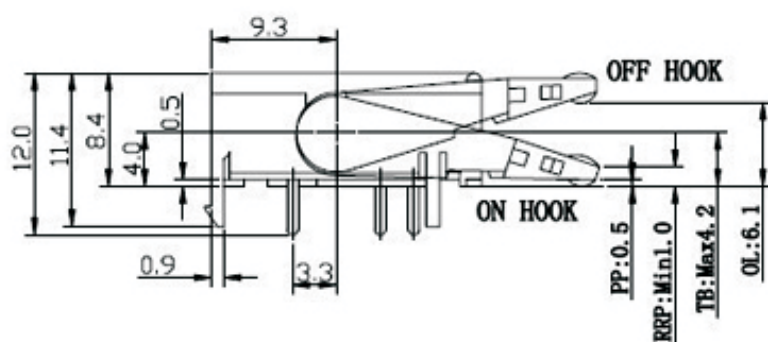

ORDER INFORMATION