

## TERMINAL BLOCK Connector

**KLS**electronic  
www.cnkls.com

### Barrier Series



#### KLS2-56B-6.35 Series

##### Electrical

Voltage rating : 300VAC  
Current rating : 10Amps/way max.  
Wire range : 16-22AWG  
Operation temperature : -40°C to +105°C  
Torque : 4kg/cm  
Insulation Resistance: 500MΩ/DC500V  
Withstanding Voltage: AC2000V/Min

##### MATERIAL

Housing : PA 66 UL94V-0  
Terminal : Brass 0.8t, Tin plated  
Screws : M2.5 Steel, Nickel Plated

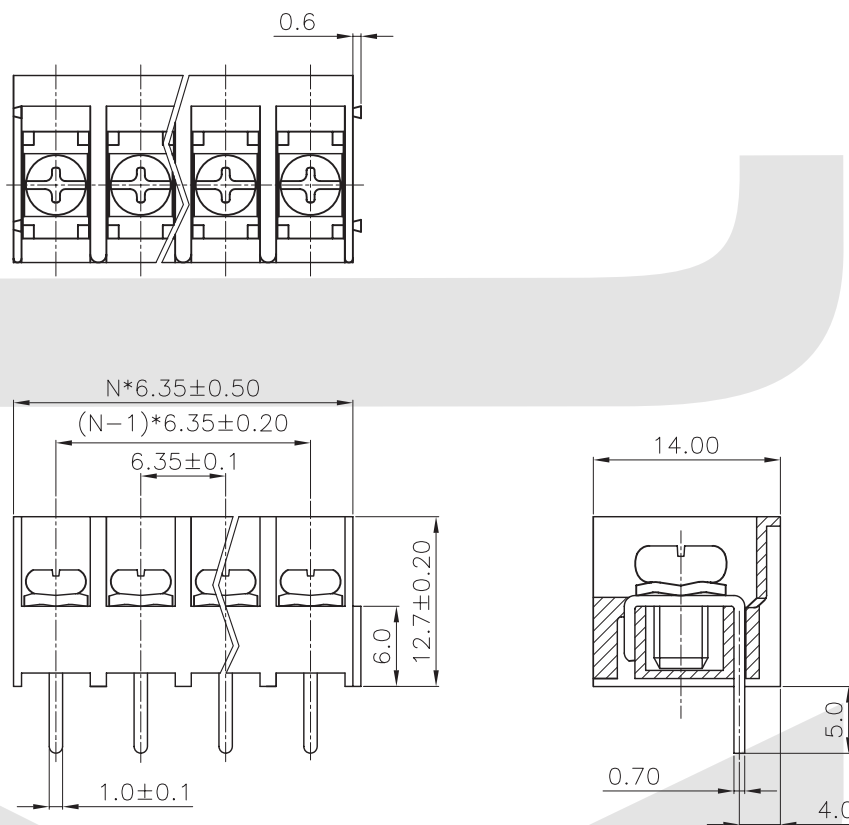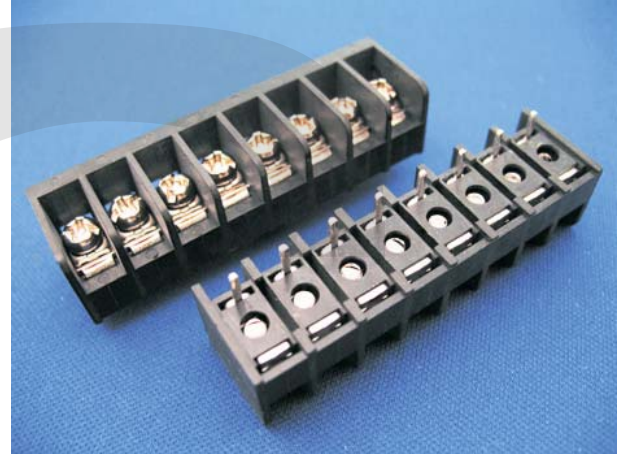

### ORDER INFORMATION

Product NO.: KLS2-56B-6.35 XXP X X

Pos. NO. \_\_\_\_\_ C=With cover D=Without cover  
Series No. \_\_\_\_\_ A=Mount Ends B=Barrier Ends  
Pitch 6.35=6.35mm \_\_\_\_\_ Pin Number

# TERMINAL BLOCK Connector

**KLS**electronic  
www.cnkls.com

## Barrier Series





### KLS2-56F-6.35 Series

#### Electrical

Voltage rating : 300VAC  
Current rating : 10Amps/way max.  
Wire range : 16-22AWG  
Operation temperature : -40°C to +105°C  
Torque : 4kg/cm  
Insulation Resistance: 500MΩ/DC500V  
Withstanding Voltage: AC2000V/Min

#### MATERIAL

Housing : PA 66 UL94V-0  
Terminal : Brass 0.8t, Tin plated  
Screws : M2.5 Steel, Nickel Plated

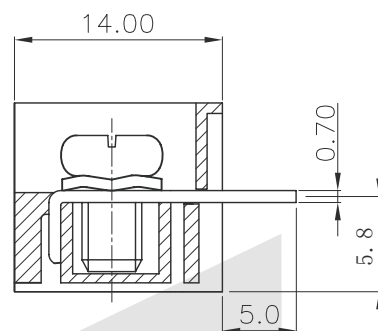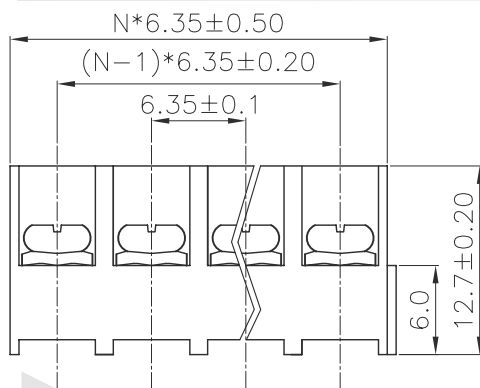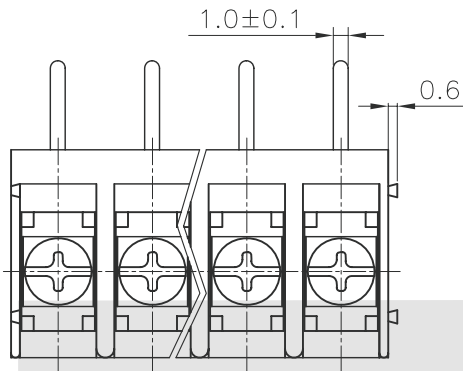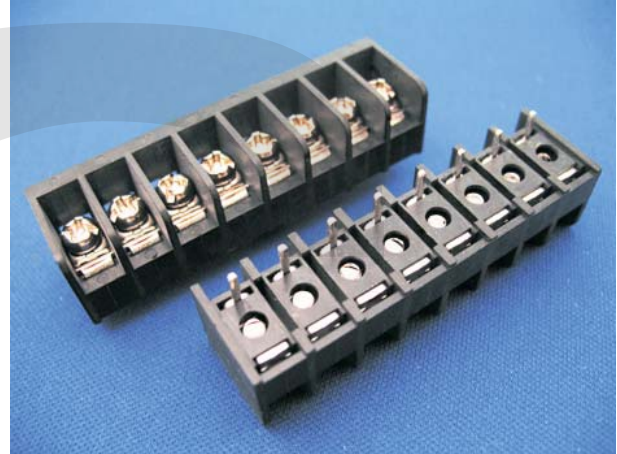

## ORDER INFORMATION

Product NO.: KLS2-56F-6.35 XXP X X

Pos. NO. \_\_\_\_\_  
Series No. \_\_\_\_\_  
Pitch 6.35=6.35mm \_\_\_\_\_

C=With cover D=Without cover  
A=Mount Ends B=Barrier Ends  
Pin Number

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information

# TERMINAL BLOCK Connector

**KLS**electronic  
www.cnkls.com

## Barrier Series





### KLS2-56G-6.35 Series

#### Electrical

Voltage rating : 300VAC  
Current rating : 10Amps/way max.  
Wire range : 16-22AWG  
Operation temperature : -40°C to +105°C  
Torque : 4kg/cm  
Insulation Resistance: 500MΩ/DC500V  
Withstanding Voltage: AC2000V/Min

#### MATERIAL

Housing : PA 66 UL94V-0  
Terminal : Brass 0.8t, Tin plated  
Screws : M2.5 Steel, Nickel Plated

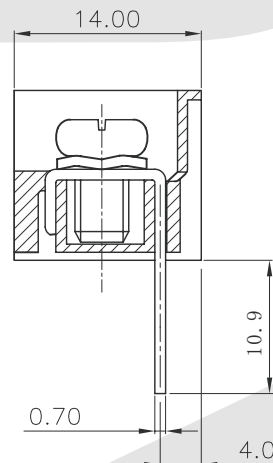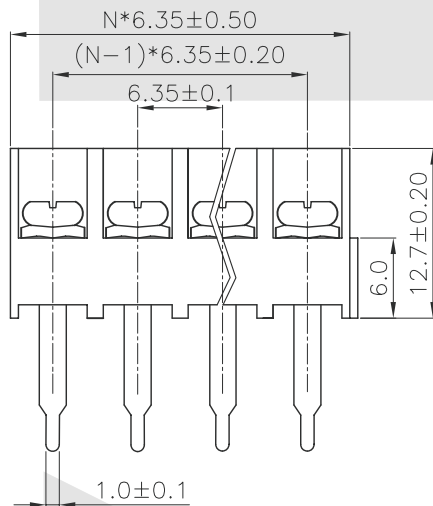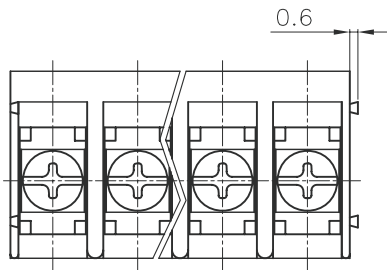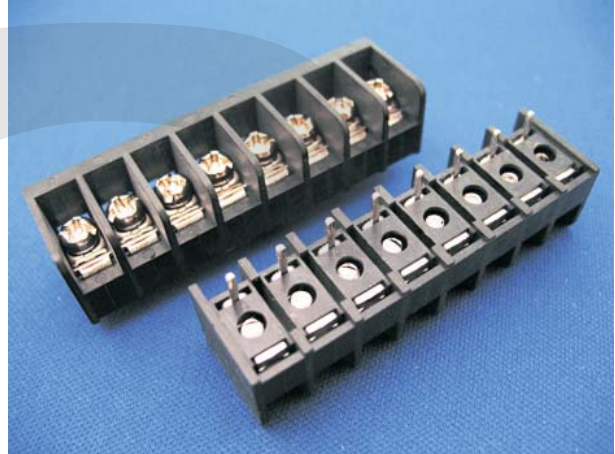

## ORDER INFORMATION

Product NO.: KLS2-56G-6.35 XXP X X

Pos. NO.

Series No.

Pitch 6.35=6.35mm

C=With cover D=Without cover

A=Mount Ends B=Barrier Ends

Pin Number

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information

# TERMINAL BLOCK Connector

**KLS**electronic  
www.cnkls.com

## Barrier Series


### KLS2-25A-7.62 Series

#### Electrical



Voltage rating : 300V  
Current rating : 10A  
Wire range : 14-22AWG  
Operation temperature : -40°C to +105°C  
Torque : 4kg/cm  
Insulation Resistance: 500MΩ/DC500V  
Withstanding Voltage: AC2000V/Min

#### MATERIAL


Housing : PA 66 UL94V-0  
Terminal : Brass 0.8t, Tin plated  
Screws : M3 Steel, Nickel Plated

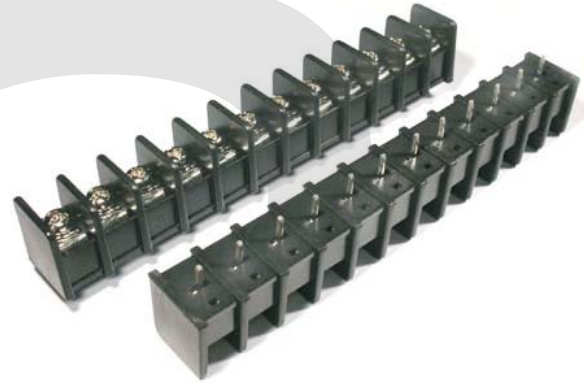

II

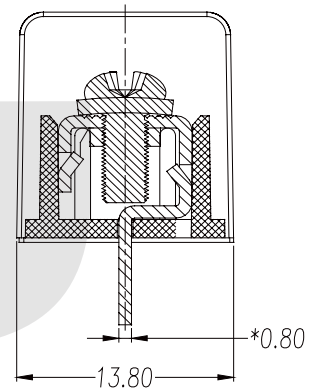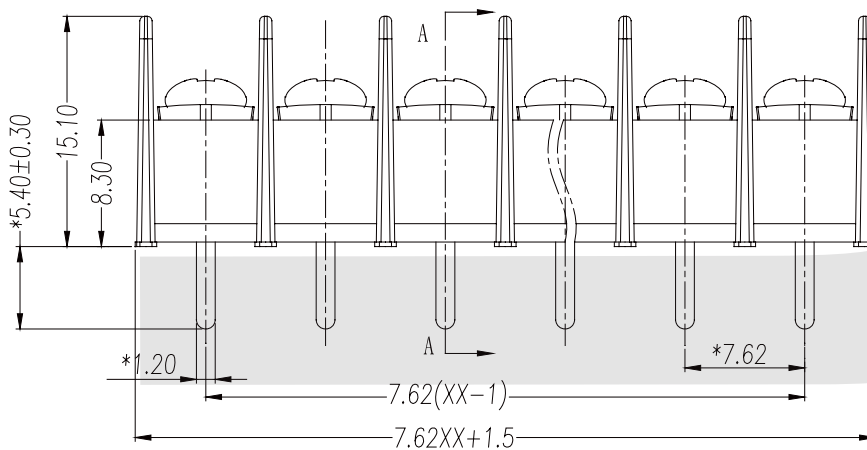

SECTION A-A

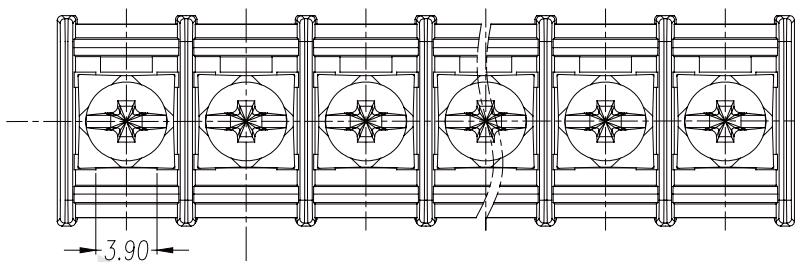

## ORDER INFORMATION

Product NO.: KLS2-25A-7.62 XXP B

Pos. NO. \_\_\_\_\_

Series No. \_\_\_\_\_

Pitch 7.62=7.62mm \_\_\_\_\_

A=Mount Ends B=Barrier Ends

Pin Number \_\_\_\_\_

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information

# TERMINAL BLOCK Connector

**KLS**electronic  
www.cnkls.com

## Barrier Series


### KLS2-25A-7.62 Series

#### Electrical


Voltage rating : 300V  
Current rating : 10A  
Wire range : 14-22AWG  
Operation temperature : -40°C to +105°C  
Torque : 4kg/cm  
Insulation Resistance: 500MΩ/DC500V  
Withstanding Voltage: AC2000V/Min

#### MATERIAL

Housing : PA 66 UL94V-0  
Terminal : Brass 0.8t, Tin plated  
Screws : M3 Steel, Nickel Plated

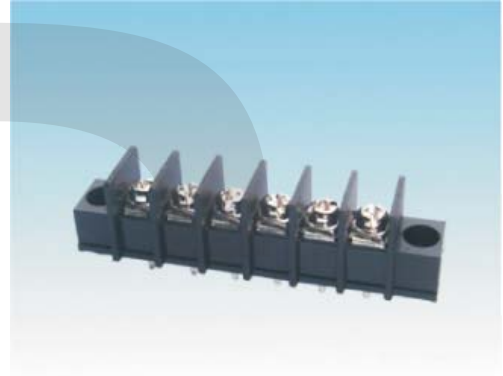

II

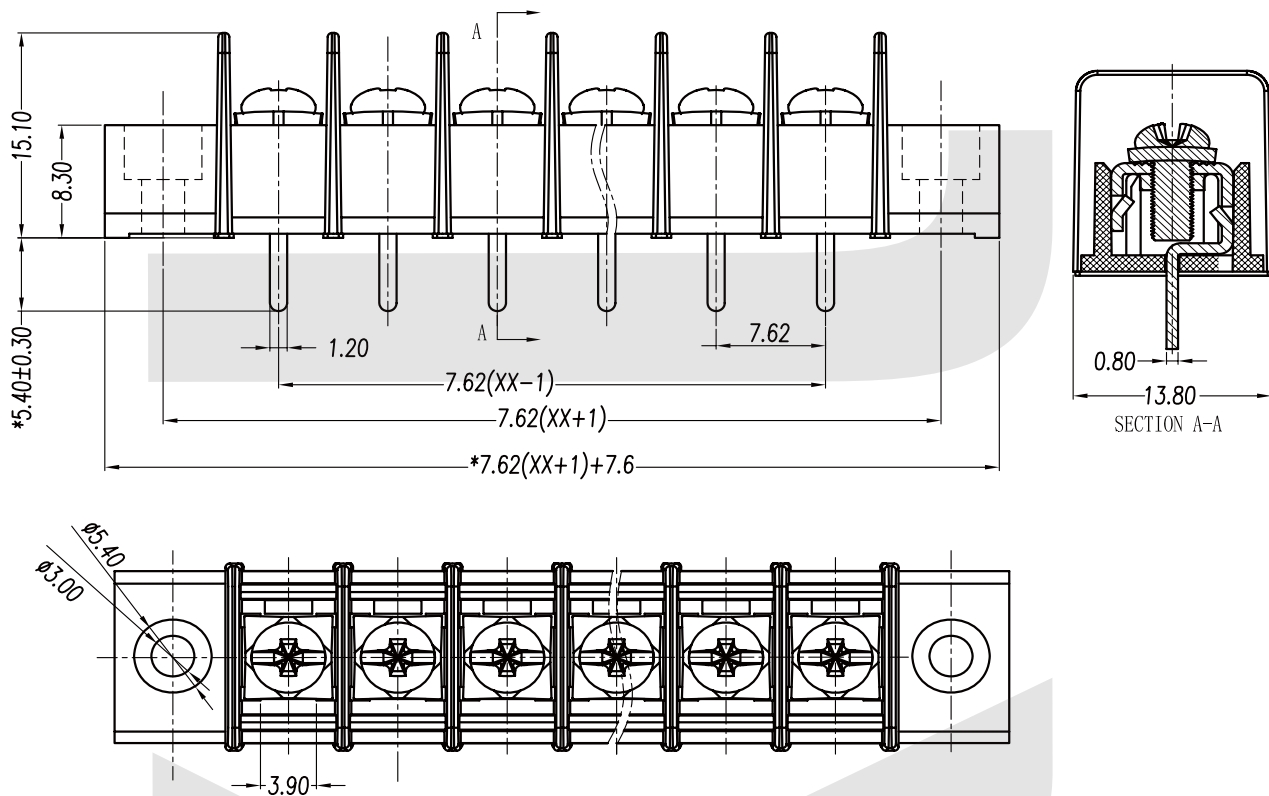

## ORDER INFORMATION

Product NO.: KLS2-25A-7.62 XXP A

Pos. NO. \_\_\_\_\_

Series No. \_\_\_\_\_

Pitch 7.62=7.62mm \_\_\_\_\_

A=Mount Ends B=Barrier Ends

Pin Number \_\_\_\_\_

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information

# TERMINAL BLOCK Connector

**KLS**electronic  
www.cnkls.com

## Barrier Series




### KLS2-25B-7.62 Series

#### Electrical

Voltage rating : 300V  
Current rating : 10A  
Wire range : 14-22AWG  
Operation temperature : -40°C to +105°C  
Torque : 4kg/cm  
Insulation Resistance: 500MΩ/DC500V  
Withstanding Voltage: AC2000V/Min

#### MATERIAL

Housing : PA 66 UL94V-0  
Terminal : Brass 0.8t, Tin plated  
Screws : M3 Steel, Nickel Plated

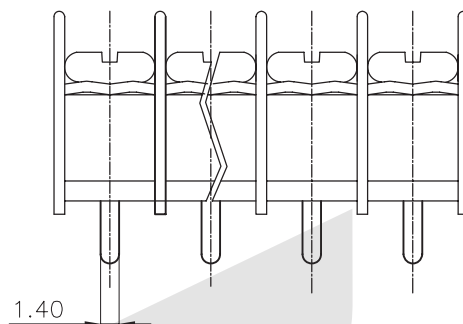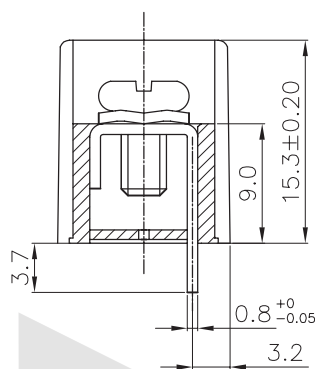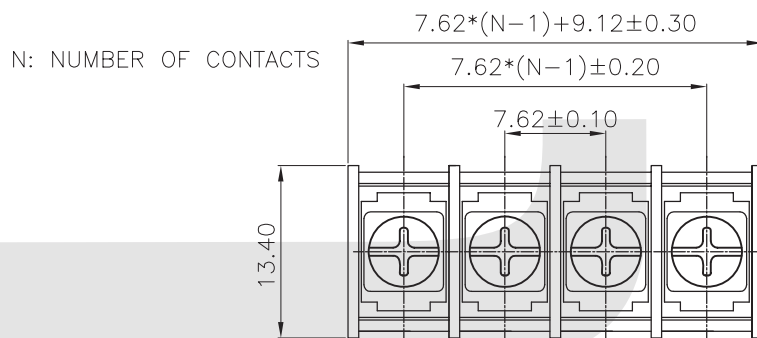

## ORDER INFORMATION

Product NO.: KLS2-25B-7.62 XXP B

Pos. NO. \_\_\_\_\_

Series No. \_\_\_\_\_

Pitch 7.62=7.62mm \_\_\_\_\_

A=Mount Ends B=Barrier Ends

Pin Number \_\_\_\_\_

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information

# TERMINAL BLOCK Connector

**KLS**electronic  
www.cnkls.com

## Barrier Series

### KLS2-25B-7.62 Series

#### Electrical


Voltage rating : 300V  
Current rating : 10A  
Wire range : 14-22AWG  
Operation temperature : -40°C to +105°C  
Torque : 4kg/cm  
Insulation Resistance: 500MΩ/DC500V  
Withstanding Voltage: AC2000V/Min

#### MATERIAL

Housing : PA 66 UL94V-0  
Terminal : Brass 0.8t, Tin plated  
Screws : M3 Steel, Nickel Plated



II

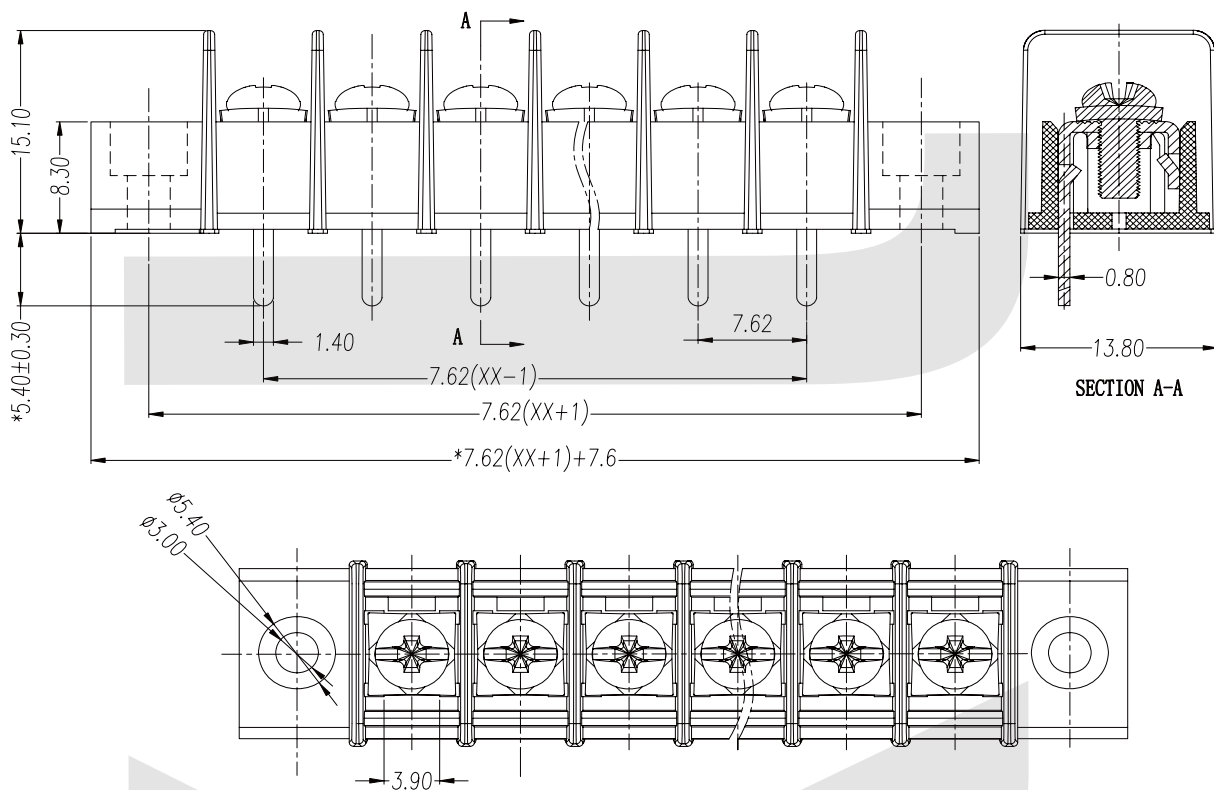

## ORDER INFORMATION

Product NO.: KLS2-25B-7.62 XXP A

Pos. NO. \_\_\_\_\_

Series No. \_\_\_\_\_

Pitch 7.62=7.62mm \_\_\_\_\_

A=Mount Ends B=Barrier Ends

Pin Number \_\_\_\_\_

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information






**KLS**electronic  
www.cnkls.com

## KLS2-25C-7.62 Series

Voltage rating : 300V  
Current rating : 10A  
Wire range : 14-22AWG  
Operation temperature : -40°C to +105°C  
Torque : 4kg/cm  
Insulation Resistance: 500MΩ/DC500V  
Withstanding Voltage: AC2000V/Min

Housing : PA 66 UL94V-0  
Terminal : Brass 0.8t, Tin plated  
Screws : M3 Steel, Nickel Plated

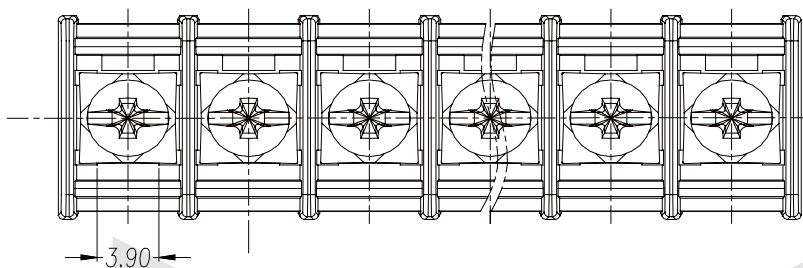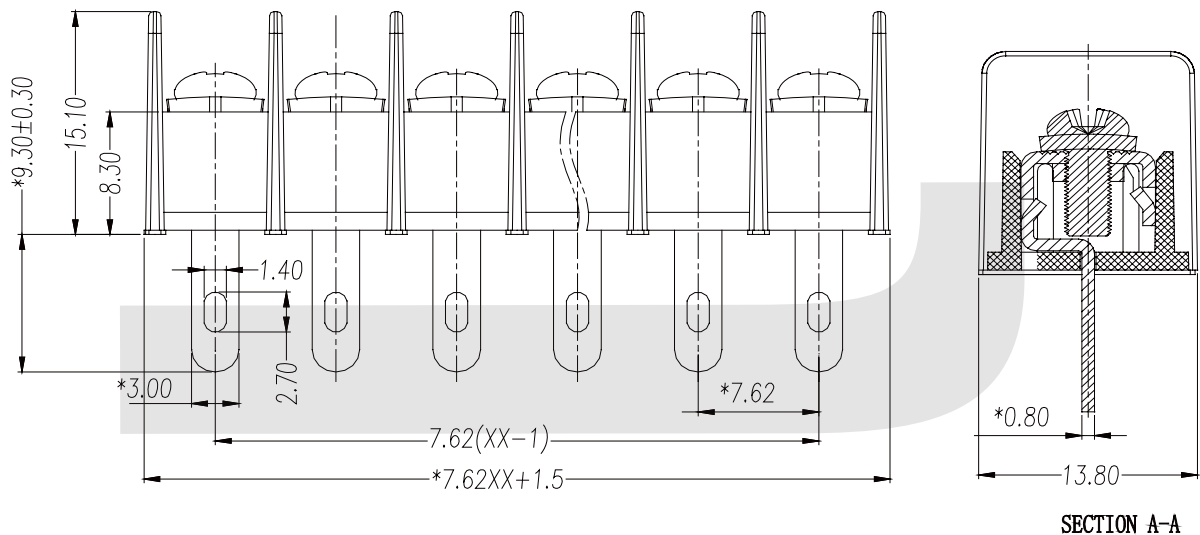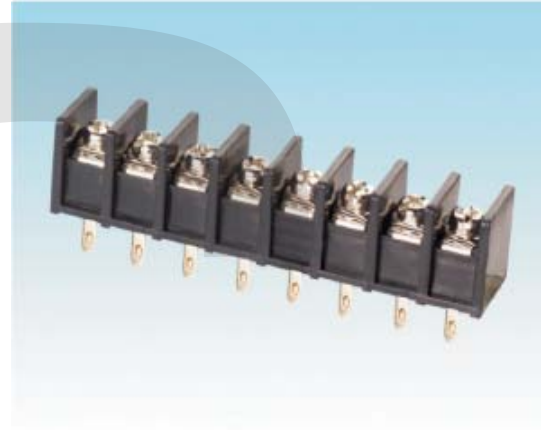Product NO.: KLS2-25C-7.62 XXP B

Pin Number



# TERMINAL BLOCK Connector

**KLS**electronic  
www.cnkls.com

## Barrier Series


### KLS2-25C-7.62 Series

#### Electrical

Voltage rating : 300V  
Current rating : 10A  
Wire range : 14-22AWG  
Operation temperature : -40°C to +105°C  
Torque : 4kg/cm  
Insulation Resistance: 500MΩ/DC500V  
Withstanding Voltage: AC2000V/Min

#### MATERIAL

Housing : PA 66 UL94V-0  
Terminal : Brass 0.8t, Tin plated  
Screws : M3 Steel, Nickel Plated

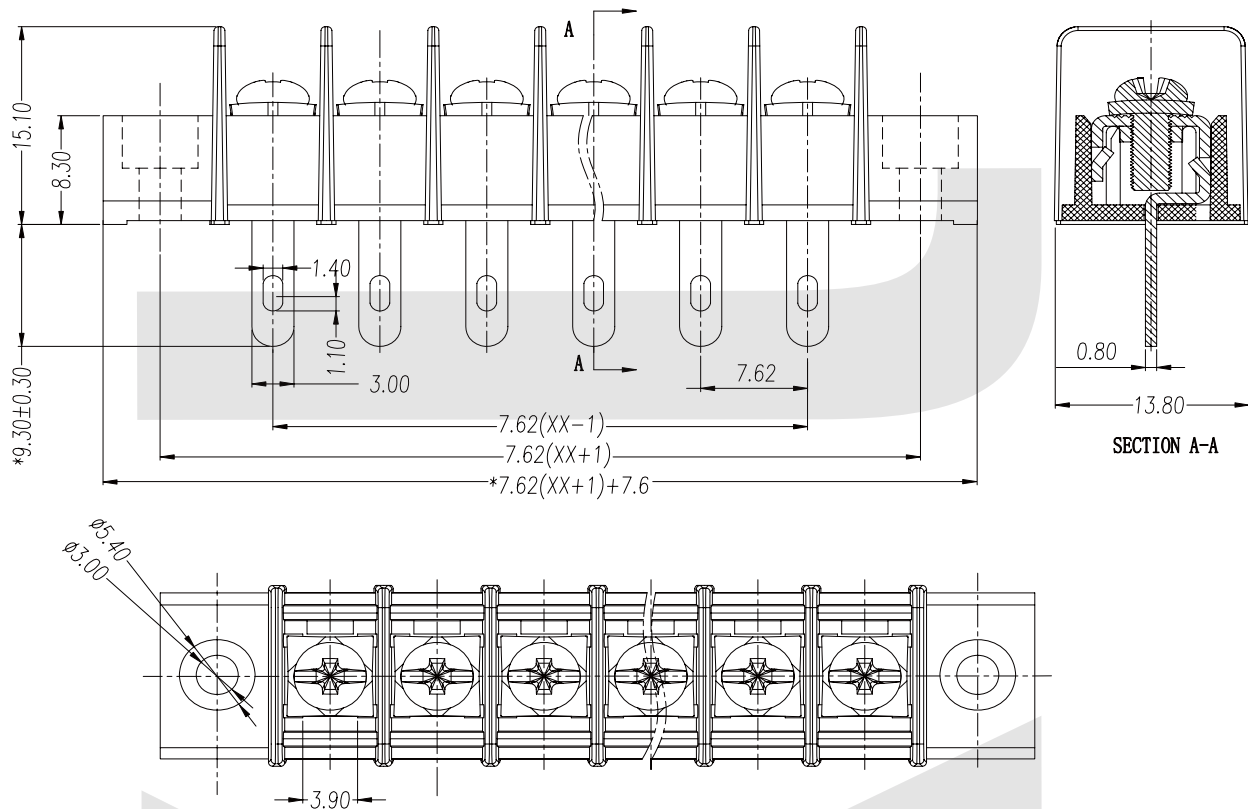

## ORDER INFORMATION

Product NO.: KLS2-25C-7.62 XXP A

Pos. NO. \_\_\_\_\_

Series No. \_\_\_\_\_

Pitch 7.62=7.62mm

A=Mount Ends B=Barrier Ends

Pin Number

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information

# TERMINAL BLOCK Connector

**KLS**electronic  
www.cnkls.com

## Barrier Series



### KLS2-56B-8.25 Series

#### Electrical

Voltage rating : 300V  
Current rating : 10A  
Wire range : 14-22AWG  
Operation temperature : -40°C to +105°C  
Torque : 4kg/cm  
Insulation Resistance : 500MΩ/DC500V  
Withstanding Voltage : AC2000V/Min

#### MATERIAL

Housing : PA 66 UL94V-0  
Terminal : Brass 0.8t, Tin plated  
Screws : M3 Steel, Nickel Plated

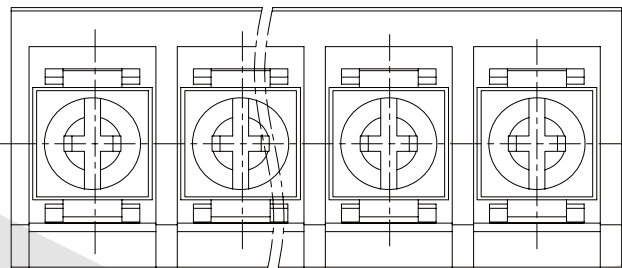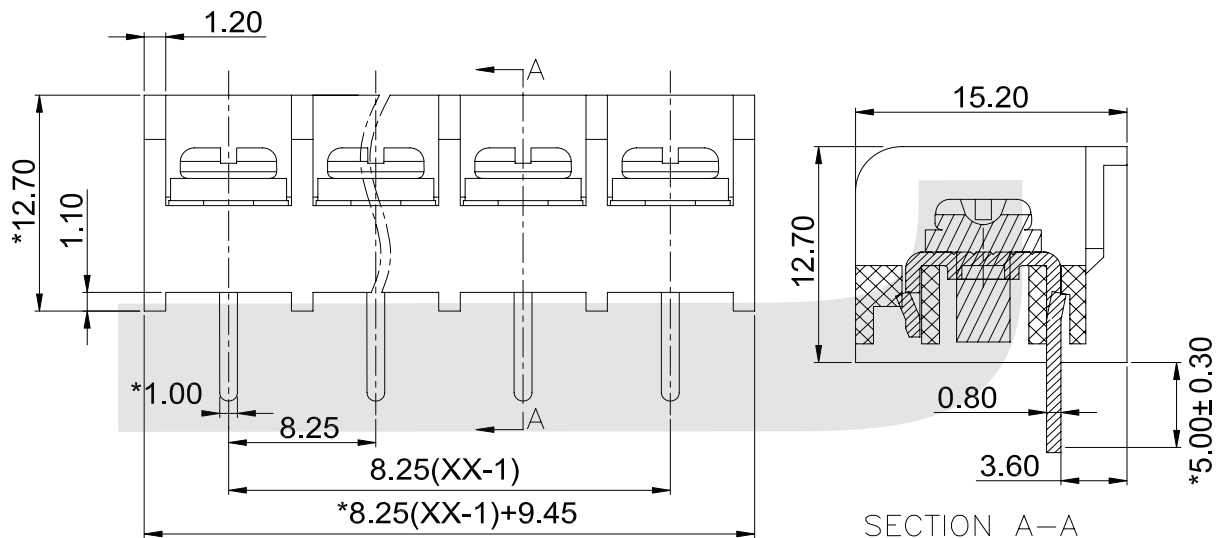

## ORDER INFORMATION

Product NO.: KLS2-56B-8.25 XXP B

Pos. NO. \_\_\_\_\_

Series No. \_\_\_\_\_

Pitch 8.25=8.25mm \_\_\_\_\_

A=Mount Ends B=Barrier Ends

Pin Number \_\_\_\_\_

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information

# TERMINAL BLOCK Connector

**KLS**electronic  
www.cnkls.com

## Barrier Series


### KLS2-35A-8.25 Series

#### Electrical



Voltage rating : 300V  
Current rating : 15A  
Wire range : 14-22AWG  
Operation temperature : -40°C to +105°C  
Torque : 4kg/cm  
Insulation Resistance: 500MΩ/DC500V  
Withstanding Voltage: AC2000V/Min

#### MATERIAL


Housing : PA 66 UL94V-0  
Terminal : Brass 0.8t, Tin plated  
Screws : M3 Steel, Nickel Plated

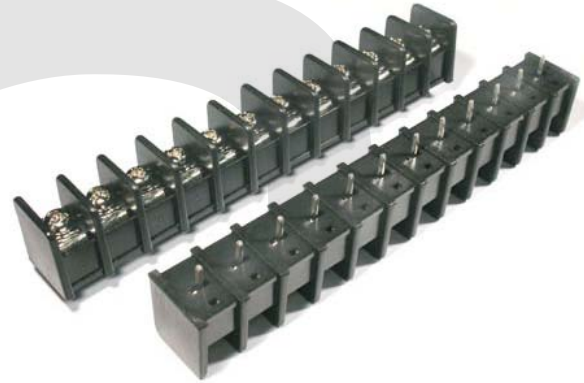

II

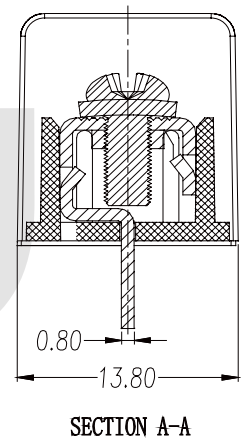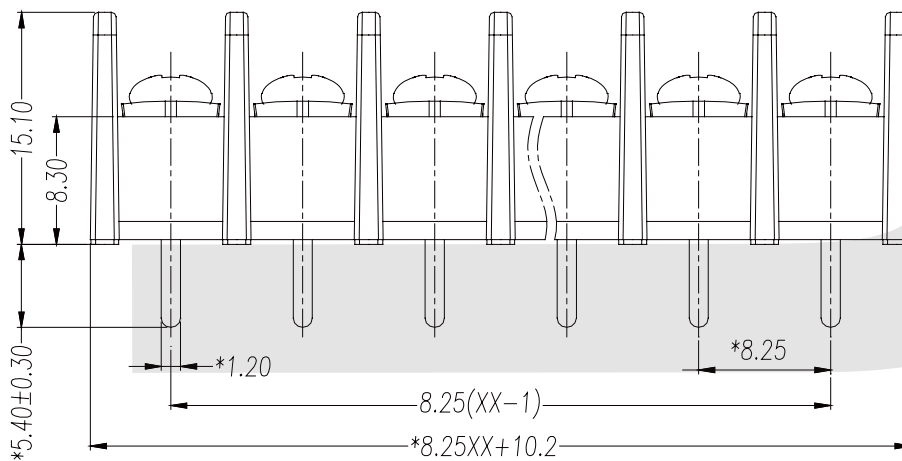

SECTION A-A

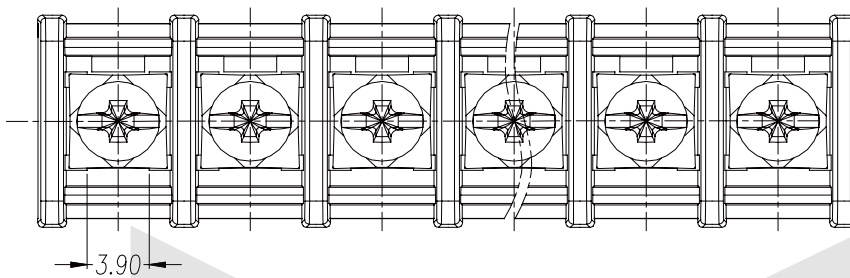

## ORDER INFORMATION

Product NO.: KLS2-35A-8.25 XXP B

Pos. NO. \_\_\_\_\_

Series No. \_\_\_\_\_

Pitch 8.25=8.25mm \_\_\_\_\_

A=Mount Ends B=Barrier Ends

Pin Number \_\_\_\_\_

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information

# TERMINAL BLOCK Connector

**KLS**electronic  
www.cnkls.com

## Barrier Series

### KLS2-35A-8.25 Series

#### Electrical


Voltage rating : 300V  
Current rating : 15A  
Wire range : 14-22AWG  
Operation temperature : -40°C to +105°C  
Torque : 4kg/cm  
Insulation Resistance: 500MΩ/DC500V  
Withstanding Voltage: AC2000V/Min

#### MATERIAL

Housing : PA 66 UL94V-0  
Terminal : Brass 0.8t, Tin plated  
Screws : M3 Steel, Nickel Plated



II

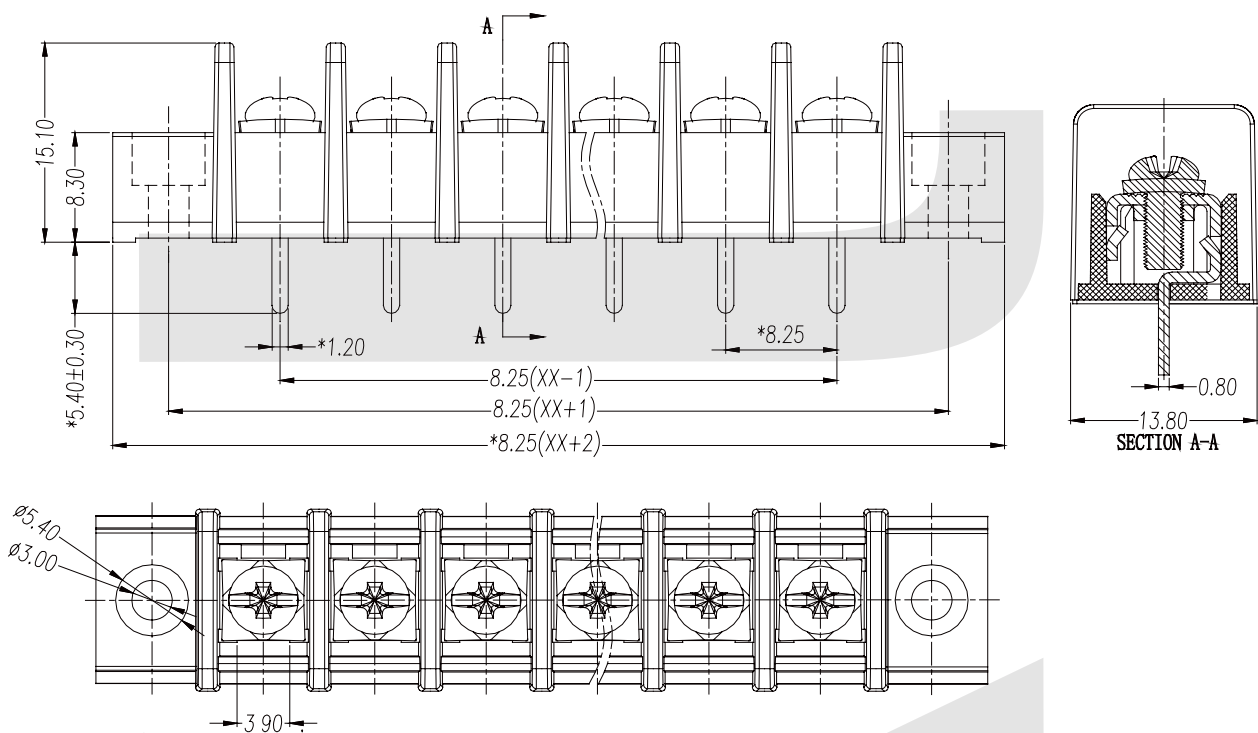

## ORDER INFORMATION

Product NO.: KLS2-35A-8.25 XXP A

Pos. NO. \_\_\_\_\_

Series No. \_\_\_\_\_

Pitch 8.25=8.25mm

A=Mount Ends B=Barrier Ends

Pin Number

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information

# TERMINAL BLOCK Connector

**KLS**electronic  
www.cnkls.com

## Barrier Series

### KLS2-35B-8.25 Series

#### Electrical


Voltage rating : 300V  
Current rating : 15A  
Wire range : 14-22AWG  
Operation temperature : -40°C to +105°C  
Torque : 4kg/cm  
Insulation Resistance: 500MΩ/DC500V  
Withstanding Voltage: AC2000V/Min

#### MATERIAL

Housing : PA 66 UL94V-0  
Terminal : Brass 0.8t, Tin plated  
Screws : M3 Steel, Nickel Plated



II

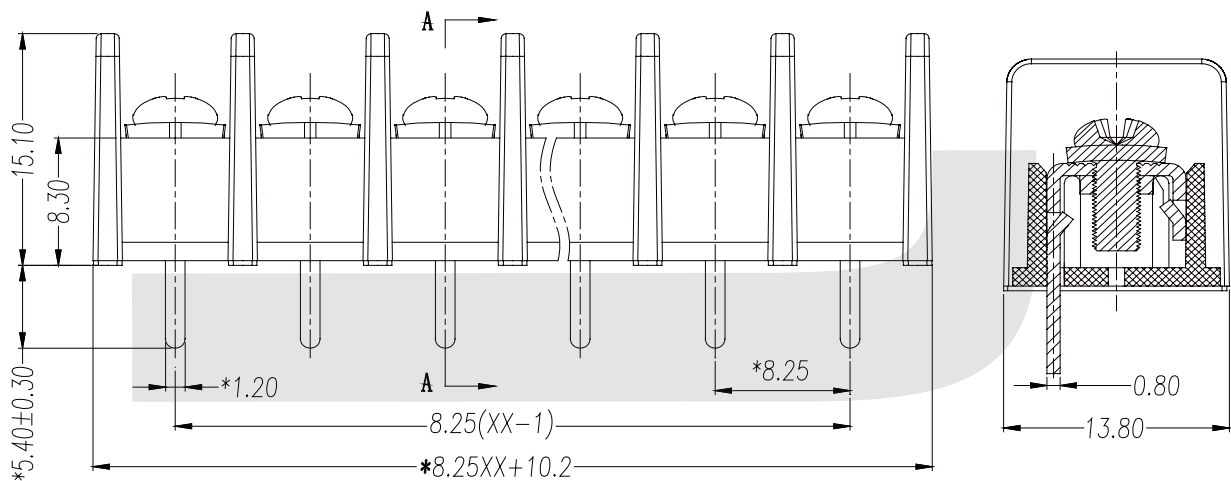

## ORDER INFORMATION

Product NO.: KLS2-35B-8.25 XXP B

Pos. NO.

Series No.

Pitch 8.25=8.25mm

A=Mount Ends B=Barrier Ends

Pin Number

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information

# TERMINAL BLOCK Connector

**KLS**electronic  
www.cnkls.com

## Barrier Series


### KLS2-35B-8.25 Series

#### Electrical


Voltage rating : 300V  
Current rating : 15A  
Wire range : 14-22AWG  
Operation temperature : -40°C to +105°C  
Torque : 4kg/cm  
Insulation Resistance: 500MΩ/DC500V  
Withstanding Voltage: AC2000V/Min

#### MATERIAL

Housing : PA 66 UL94V-0  
Terminal : Brass 0.8t, Tin plated  
Screws : M3 Steel, Nickel Plated

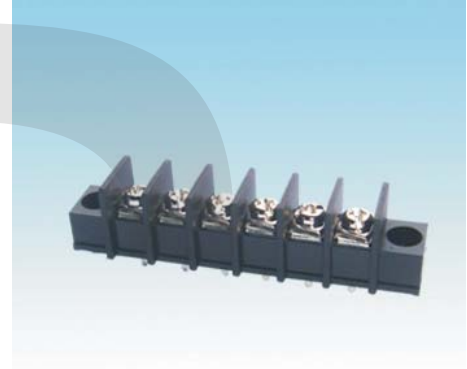

II

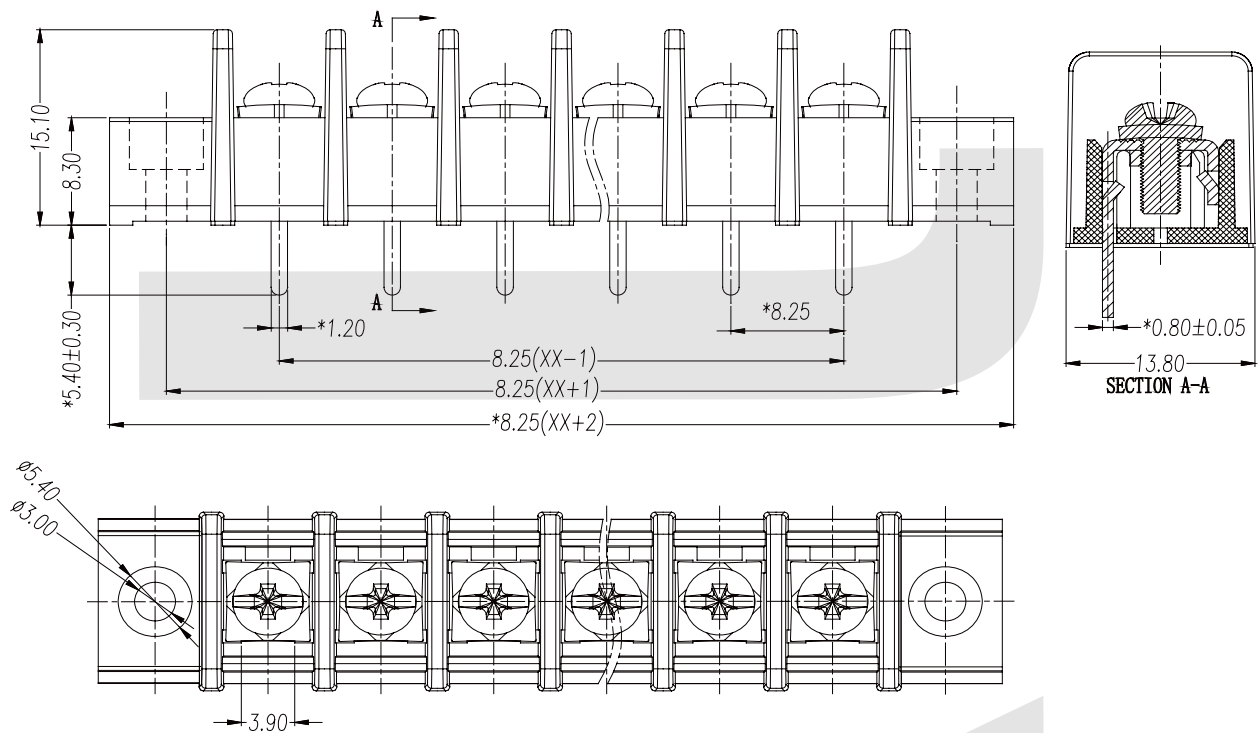

## ORDER INFORMATION

Product NO.: KLS2-35B-8.25 XXP A

Pos. NO.

Series No.

Pitch 8.25=8.25mm

A=Mount Ends B=Barrier Ends

Pin Number

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information

**KLS**electronic  
www.cnkls.com

## Barrier Series




## KLS2-35C-8.25 Series

## Electrical

Voltage rating : 300V  
Current rating : 15A  
Wire range : 14-22AWG  
Operation temperature : -40°C to +105°C  
Torque : 4kg/cm  
Insulation Resistance: 500MΩ/DC500V  
Withstanding Voltage: AC2000V/Min

## MATERIAL

Housing : PA 66 UL94V-0  
Terminal : Brass 0.8t, Tin plated  
Screws : M3 Steel, Nickel Plated

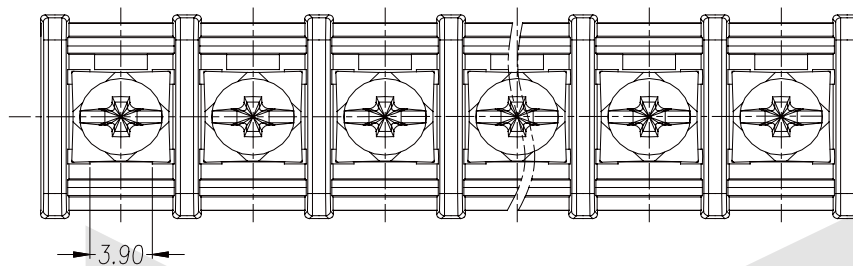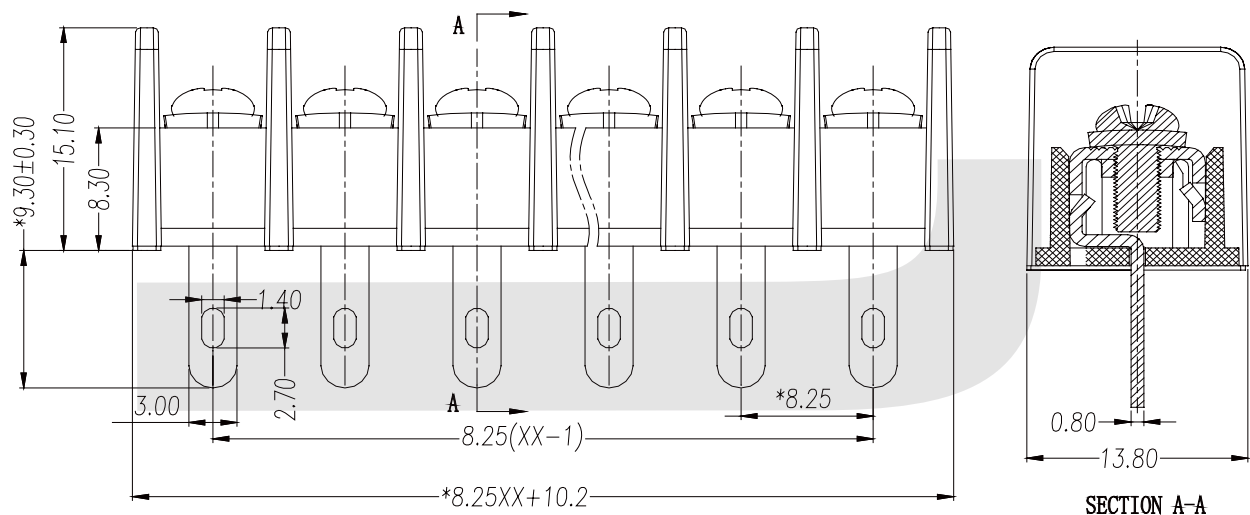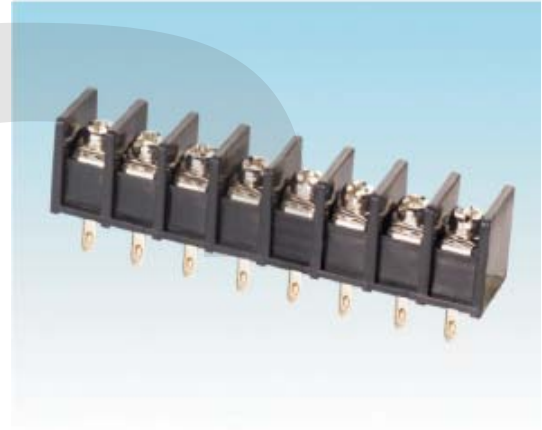

## ORDER INFORMATION

Product NO.: KLS2-35C-8.25 XXP B

Pos. NO.

Series No.

Pitch 8.25=8.25mm

A=Mount Ends    B=Barrier Ends

Pin Number

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information



# TERMINAL BLOCK Connector

**KLS**electronic  
www.cnkls.com

## Barrier Series

### KLS2-35C-8.25 Series

#### Electrical



Voltage rating : 300V  
Current rating : 15A  
Wire range : 14-22AWG  
Operation temperature : -40°C to +105°C  
Torque : 4kg/cm  
Insulation Resistance: 500MΩ/DC500V  
Withstanding Voltage: AC2000V/Min

#### MATERIAL

Housing : PA 66 UL94V-0  
Terminal : Brass 0.8t, Tin plated  
Screws : M3 Steel, Nickel Plated



II

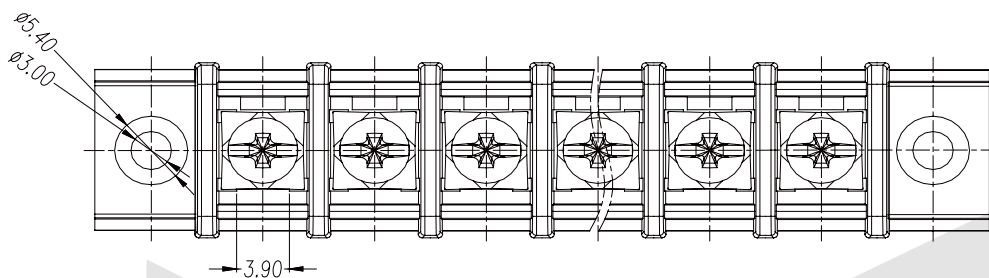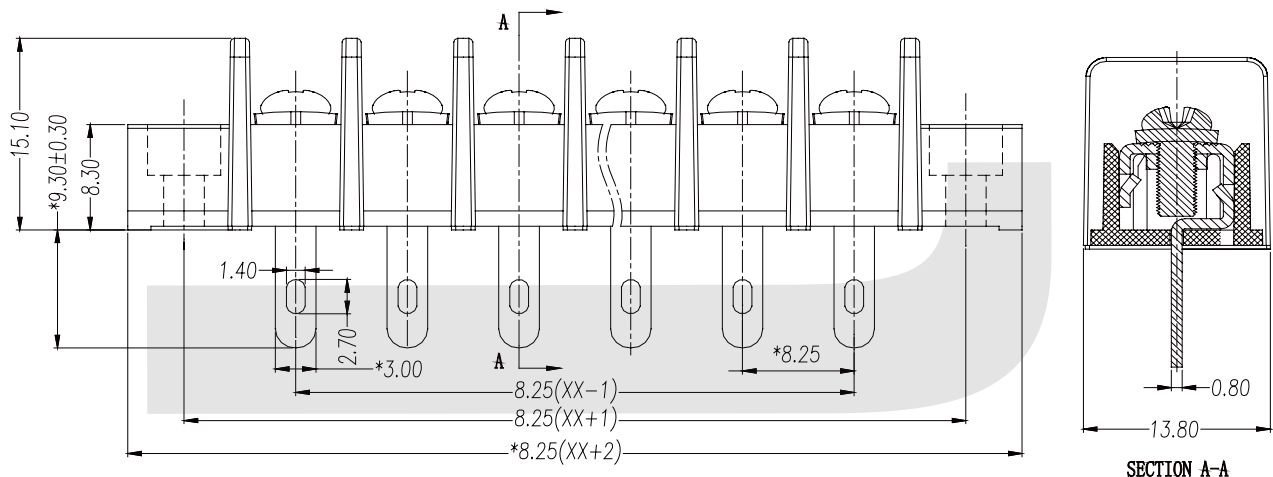

## ORDER INFORMATION

Product NO.: KLS2-35C-8.25 XXP A

Pos. NO. \_\_\_\_\_

Series No. \_\_\_\_\_

Pitch 8.25=8.25mm \_\_\_\_\_

A=Mount Ends B=Barrier Ends

Pin Number \_\_\_\_\_

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information

# TERMINAL BLOCK Connector

**KLS**electronic  
www.cnkls.com

## Barrier Series


### KLS2-35R-8.25 Series

#### Electrical



Voltage rating : 300V  
Current rating : 15A  
Wire range : 14-22AWG  
Operation temperature : -40°C to +105°C  
Torque : 4kg/cm  
Insulation Resistance: 500MΩ/DC500V  
Withstanding Voltage: AC2000V/Min

#### MATERIAL

Housing : PA 66 UL94V-0  
Terminal : Brass 0.8t, Tin plated  
Screws : M3 Steel, Nickel Plated

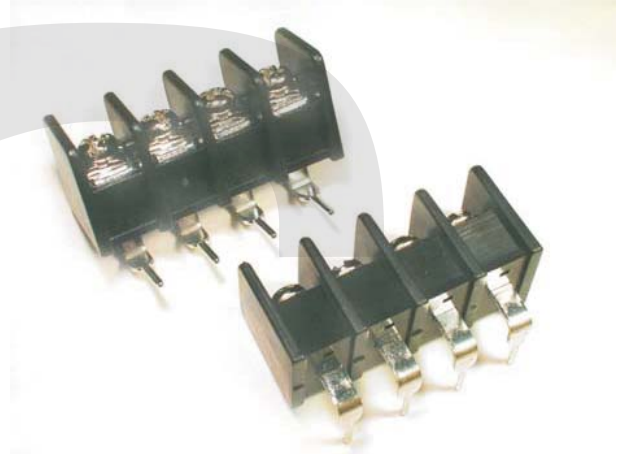

II

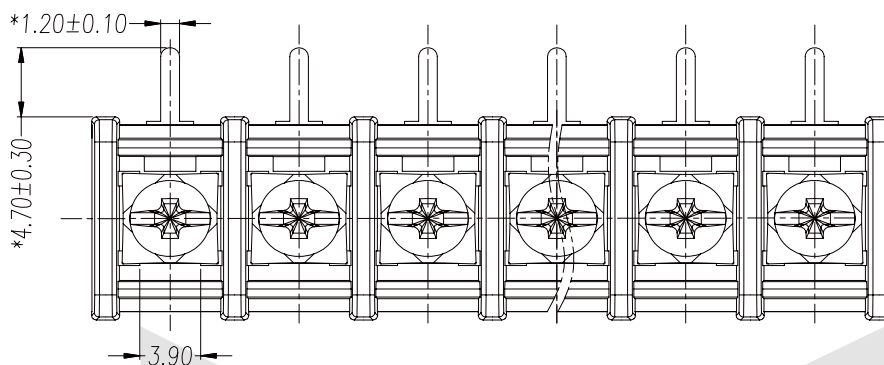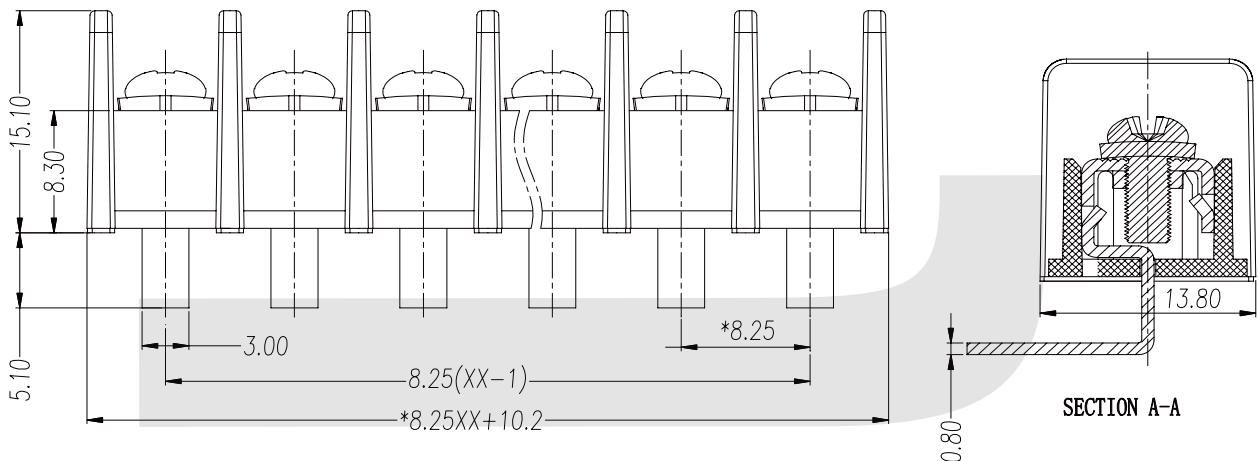

## ORDER INFORMATION

Product NO.: KLS2-35R-8.25 XXP B

Pos. NO.

Series No.

Pitch 8.25=8.25mm

A=Mount Ends B=Barrier Ends

Pin Number

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information

# TERMINAL BLOCK Connector

**KLS**electronic  
www.cnkls.com

## Barrier Series


### KLS2-35R-8.25 Series

#### Electrical


Voltage rating : 300V  
Current rating : 15A  
Wire range : 14-22AWG  
Operation temperature : -40°C to +105°C  
Torque : 4kg/cm  
Insulation Resistance: 500MΩ/DC500V  
Withstanding Voltage: AC2000V/Min

#### MATERIAL

Housing : PA 66 UL94V-0  
Terminal : Brass 0.8t, Tin plated  
Screws : M3 Steel, Nickel Plated

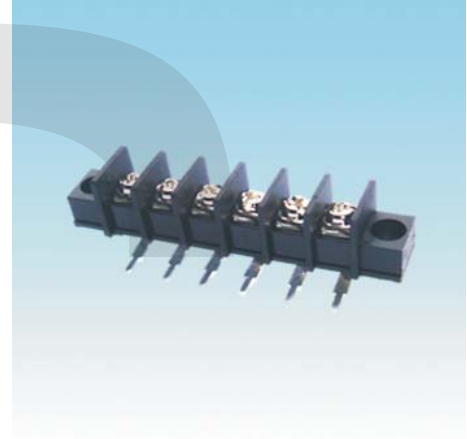

II

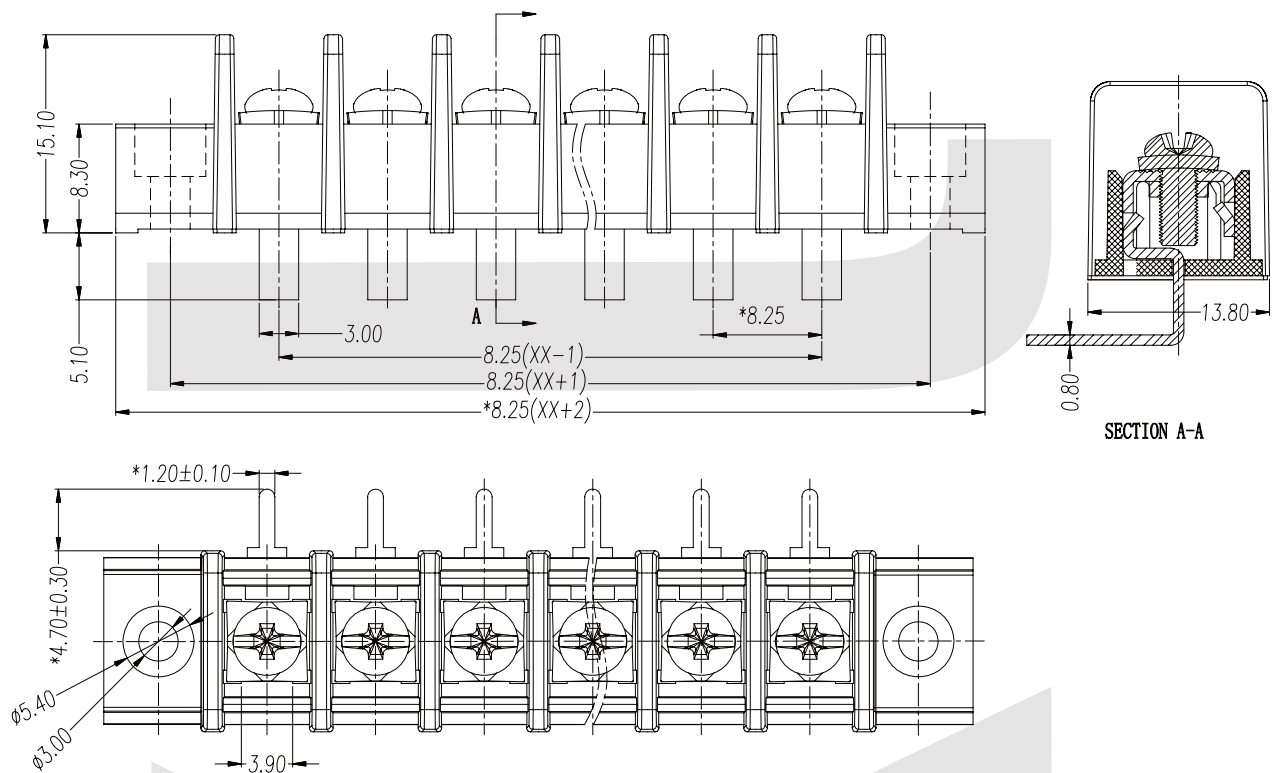

## ORDER INFORMATION

Product NO.: KLS2-35R-8.25 XXP A

Pos. NO. \_\_\_\_\_

Series No. \_\_\_\_\_

Pitch 8.25=8.25mm

A=Mount Ends B=Barrier Ends

Pin Number

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information

# TERMINAL BLOCK Connector

**KLS**electronic  
www.cnkls.com

## Barrier Series





### KLS2-45A-9.50 Series

#### Electrical

Voltage rating : 300V  
Current rating : 20A  
Wire range : 12-22AWG  
Operation temperature : -40°C to +105°C  
Torque : 4kg/cm  
Insulation Resistance: 500MΩ/DC500V  
Withstanding Voltage: AC2000V/Min

#### MATERIAL

Housing : PA 66 UL94V-0  
Terminal : Brass 0.8t, Tin plated  
Screws : M4 Steel, Nickel Plated

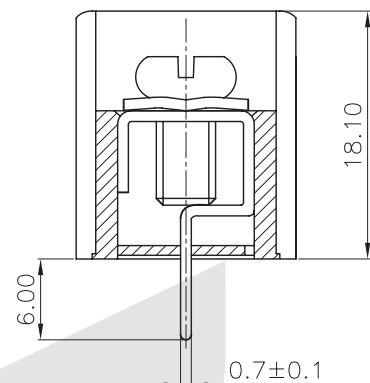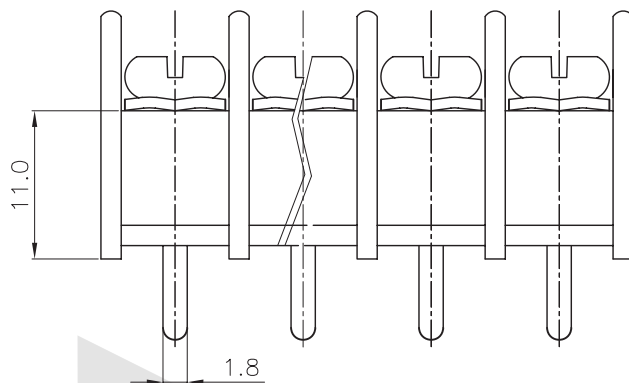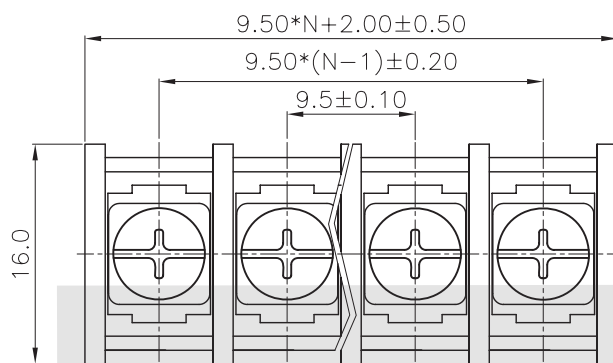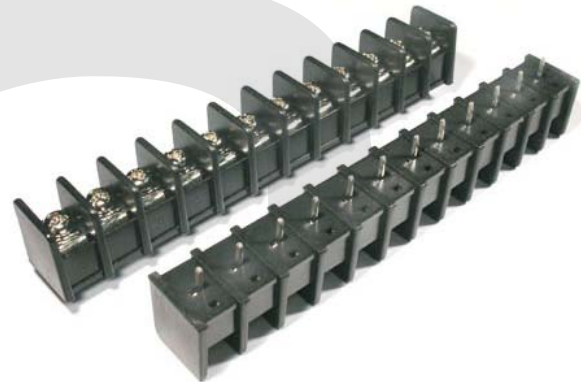

## ORDER INFORMATION

Product NO.: KLS2-45A-9.50 XXP B

Pos. NO.

Series No.

Pitch 9.50=9.50mm

A=Mount Ends B=Barrier Ends

Pin Number

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information

# TERMINAL BLOCK Connector

**KLS**electronic  
www.cnkls.com

## Barrier Series

### KLS2-45A-9.50 Series

#### Electrical




Voltage rating : 300V  
Current rating : 20A  
Wire range : 12-22AWG  
Operation temperature : -40°C to +105°C  
Torque : 4kg/cm  
Insulation Resistance: 500MΩ/DC500V  
Withstanding Voltage: AC2000V/Min

#### MATERIAL

Housing : PA 66 UL94V-0  
Terminal : Brass 0.8t, Tin plated  
Screws : M4 Steel, Nickel Plated



II

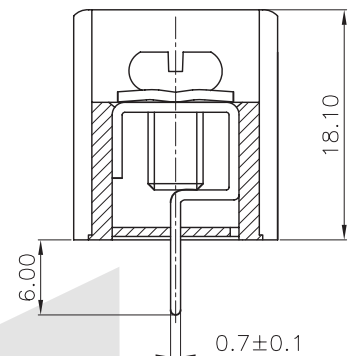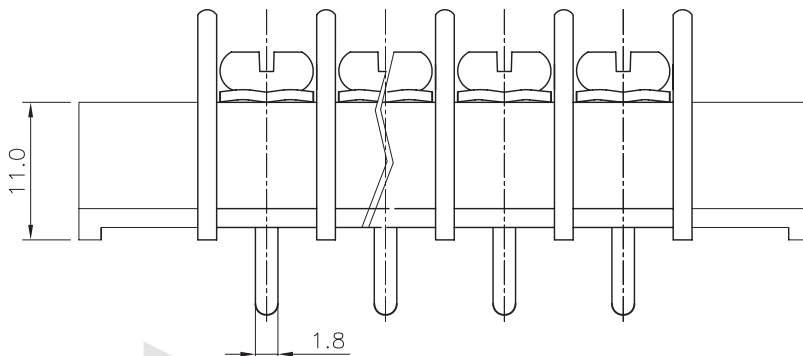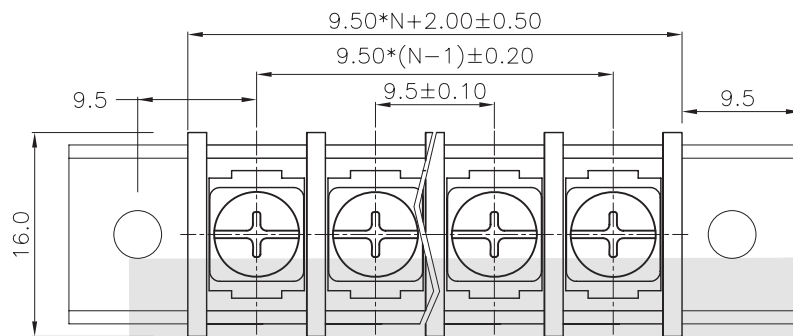

## ORDER INFORMATION

Product NO.: KLS2-45A-9.50 XXP A

Pos. NO. \_\_\_\_\_

Series No. \_\_\_\_\_

Pitch 9.50=9.50mm

A=Mount Ends B=Barrier Ends

Pin Number

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information

# TERMINAL BLOCK Connector

**KLS**electronic  
www.cnkls.com

## Barrier Series

### KLS2-45B-9.50 Series

#### Electrical


Voltage rating : 300V  
Current rating : 20A  
Wire range : 12-22AWG  
Operation temperature : -40°C to +105°C  
Torque : 4kg/cm  
Insulation Resistance: 500MΩ/DC500V  
Withstanding Voltage: AC2000V/Min

#### MATERIAL

Housing : PA 66 UL94V-0  
Terminal : Brass 0.8t, Tin plated  
Screws : M4 Steel, Nickel Plated



II

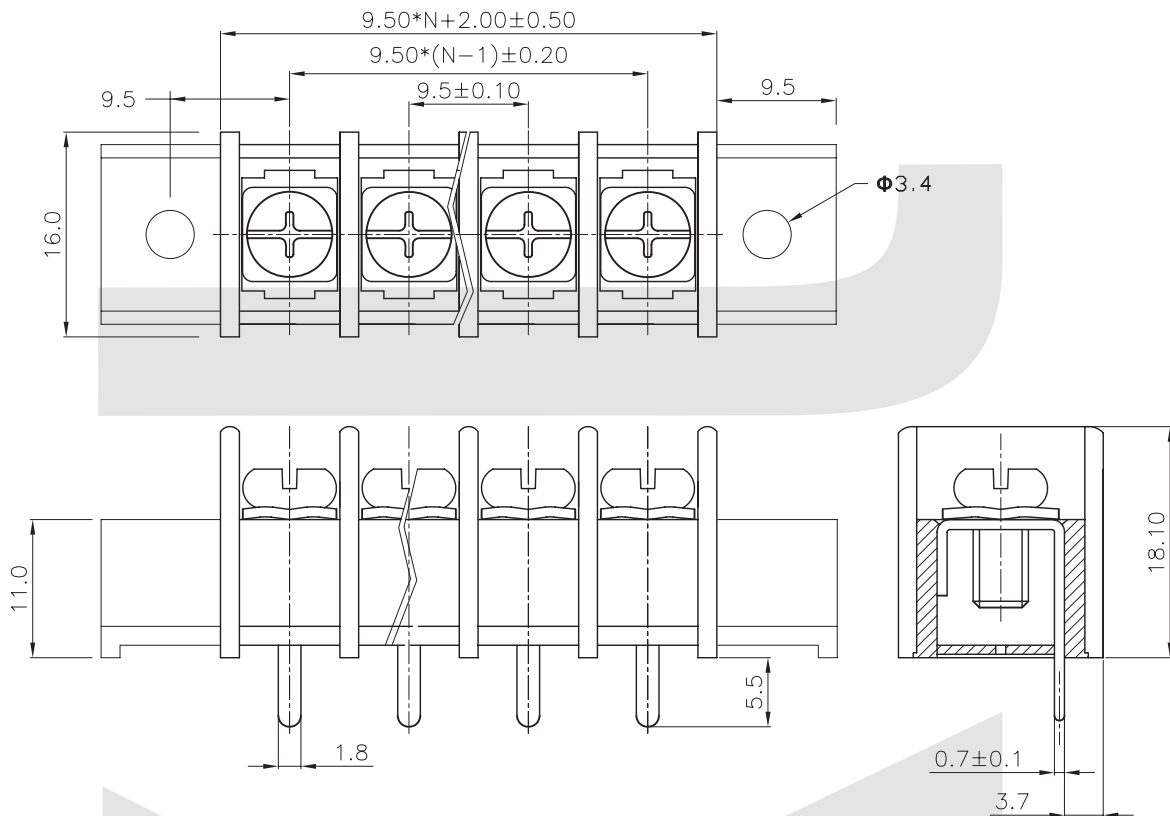

## ORDER INFORMATION

Product NO.: KLS2-45B-9.50 XXP A

Pos. NO.

Series No.

Pitch 9.50=9.50mm

A=Mount Ends B=Barrier Ends

Pin Number

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information

# TERMINAL BLOCK Connector

**KLS**electronic  
www.cnkls.com

## Barrier Series




### KLS2-45B-9.50 Series

#### Electrical

Voltage rating : 300V  
Current rating : 20A  
Wire range : 12-22AWG  
Operation temperature : -40°C to +105°C  
Torque : 4kg/cm  
Insulation Resistance: 500MΩ/DC500V  
Withstanding Voltage: AC2000V/Min

#### MATERIAL

Housing : PA 66 UL94V-0  
Terminal : Brass 0.8t, Tin plated  
Screws : M4 Steel, Nickel Plated

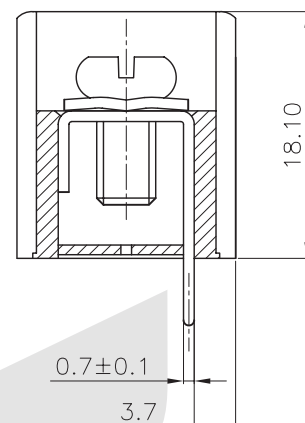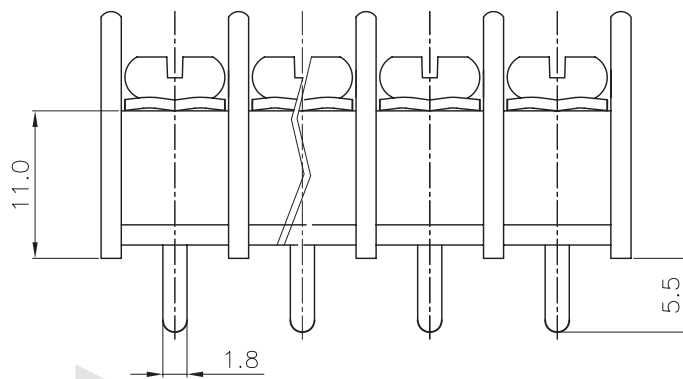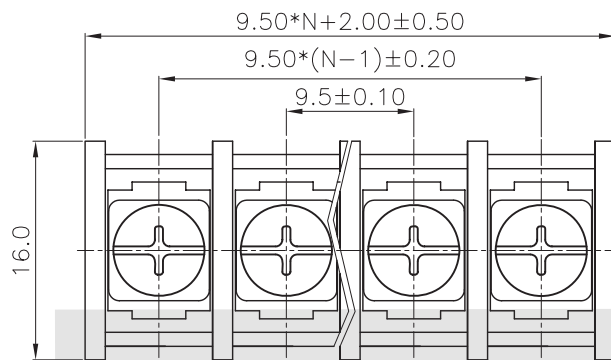

## ORDER INFORMATION

Product NO.: KLS2-45B-9.50 XXP B

Pos. NO. \_\_\_\_\_

Series No. \_\_\_\_\_

Pitch 9.50=9.50mm \_\_\_\_\_

A=Mount Ends B=Barrier Ends

Pin Number \_\_\_\_\_

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information



# TERMINAL BLOCK Connector

**KLS**electronic  
www.cnkls.com

## Barrier Series


### KLS2-45C-9.50 Series

#### Electrical




Voltage rating : 300V  
Current rating : 20A  
Wire range : 12-22AWG  
Operation temperature : -40°C to +105°C  
Torque : 4kg/cm  
Insulation Resistance: 500MΩ/DC500V  
Withstanding Voltage: AC2000V/Min

#### MATERIAL

Housing : PA 66 UL94V-0  
Terminal : Brass 0.8t, Tin plated  
Screws : M4 Steel, Nickel Plated

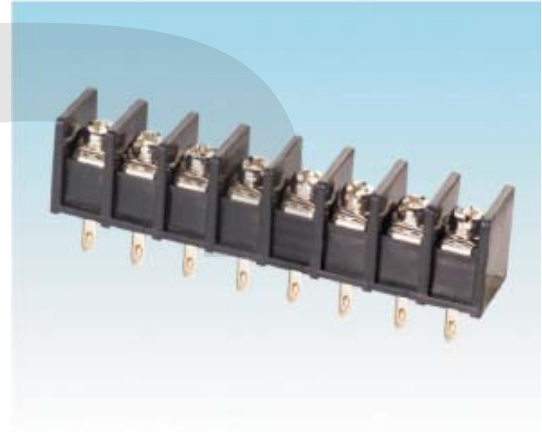

II

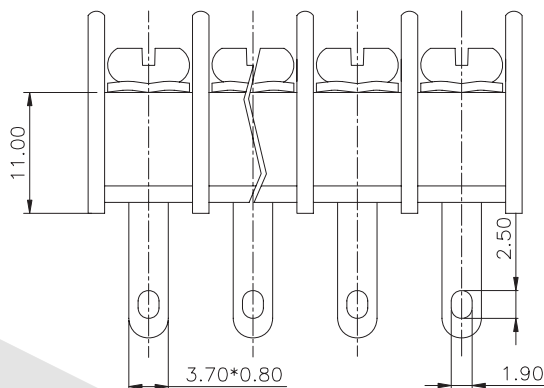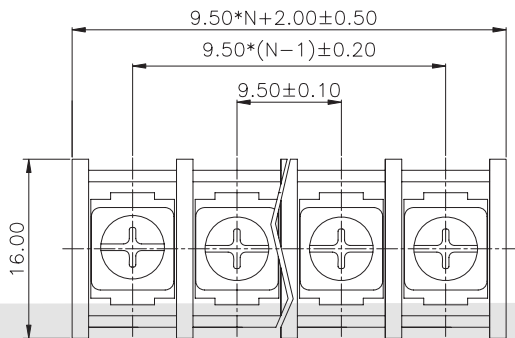

## ORDER INFORMATION

Product NO.: KLS2-45C-9.50 XXP B

Pos. NO.

Series No.

Pitch 9.50=9.50mm

A=Mount Ends B=Barrier Ends

Pin Number

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information

# TERMINAL BLOCK Connector

**KLS**electronic  
www.cnkls.com

## Barrier Series


### KLS2-45C-9.50 Series

#### Electrical

Voltage rating : 300V  
Current rating : 20A  
Wire range : 12-22AWG  
Operation temperature : -40°C to +105°C  
Torque : 4kg/cm  
Insulation Resistance: 500MΩ/DC500V  
Withstanding Voltage: AC2000V/Min

#### MATERIAL

Housing : PA 66 UL94V-0  
Terminal : Brass 0.8t, Tin plated  
Screws : M4 Steel, Nickel Plated

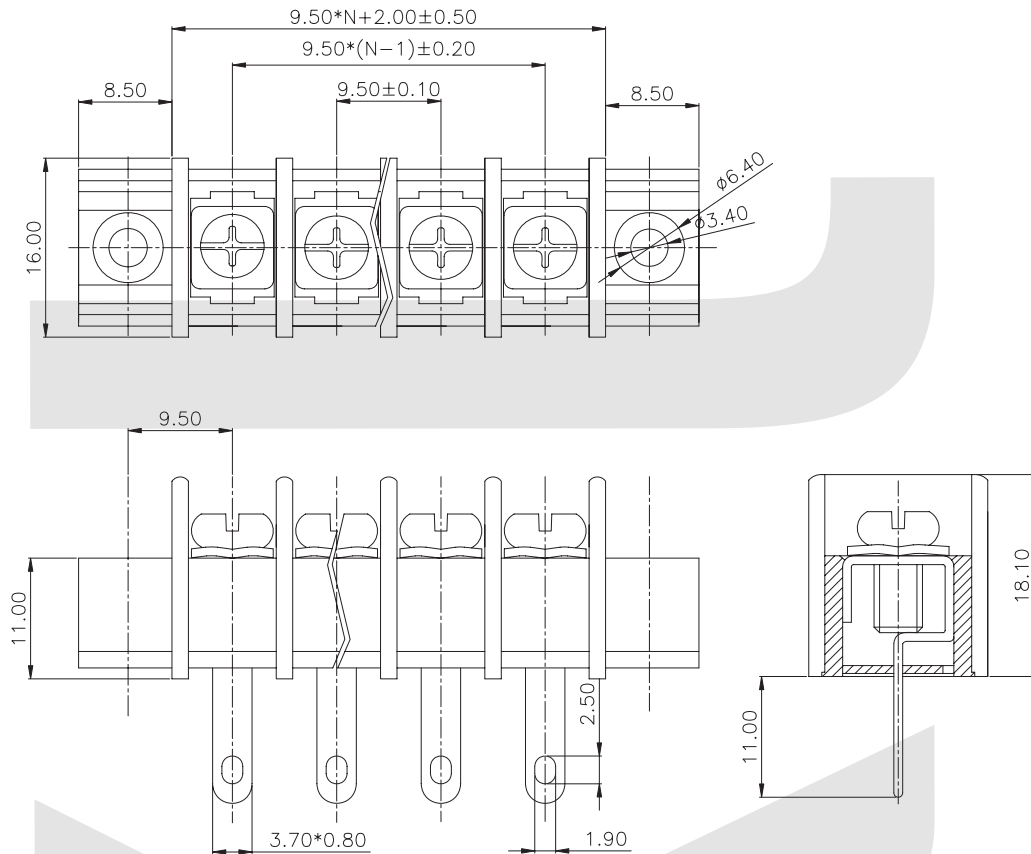

## ORDER INFORMATION

Product NO.: KLS2-45C-9.50 XXP A

Pos. NO.

Series No.

Pitch 9.50=9.50mm

A=Mount Ends B=Barrier Ends

Pin Number

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information

# TERMINAL BLOCK Connector

**KLS**electronic  
www.cnkls.com

## Barrier Series



### KLS2-45R-9.50 Series

#### Electrical

Voltage rating : 300V  
Current rating : 20A  
Wire range : 12-22AWG  
Operation temperature : -40°C to +105°C  
Torque : 4kg/cm  
Insulation Resistance: 500MΩ/DC500V  
Withstanding Voltage: AC2000V/Min

#### MATERIAL

Housing : PA 66 UL94V-0  
Terminal : Brass 0.8t, Tin plated  
Screws : M4 Steel, Nickel Plated

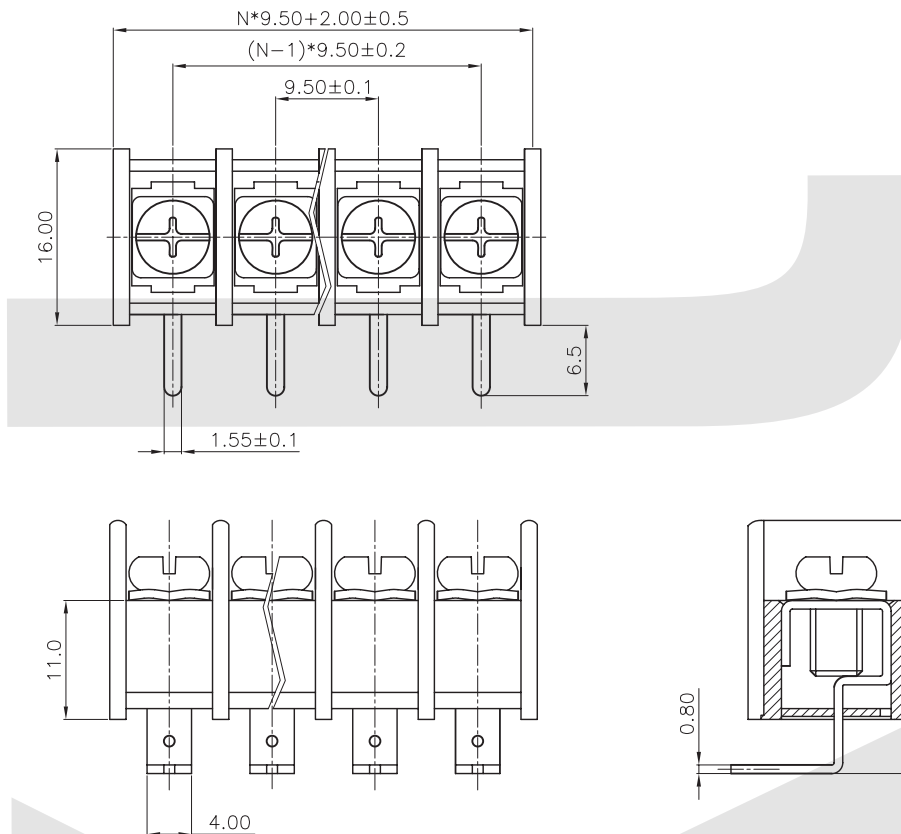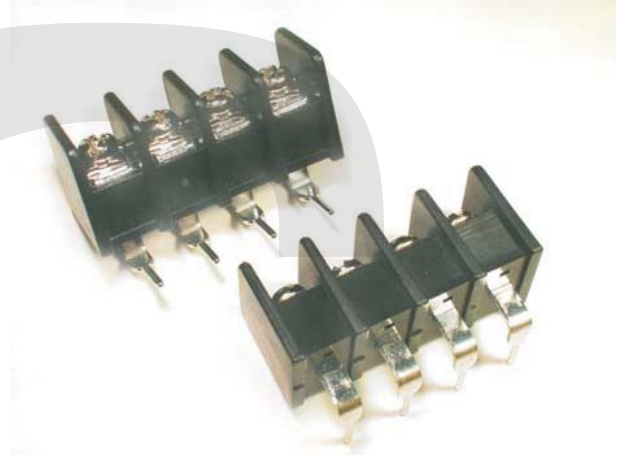

## ORDER INFORMATION

Product NO.: KLS2-45R-9.50 XXP B

Pos. NO. \_\_\_\_\_

Series No. \_\_\_\_\_

Pitch 9.50=9.50mm

A=Mount Ends B=Barrier Ends

Pin Number

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information

# TERMINAL BLOCK Connector

**KLS**electronic  
www.cnkls.com

## Barrier Series





### KLS2-45R-9.50 Series

#### Electrical

Voltage rating : 300V  
Current rating : 20A  
Wire range : 12-22AWG  
Operation temperature : -40°C to +105°C  
Torque : 4kg/cm  
Insulation Resistance: 500MΩ/DC500V  
Withstanding Voltage: AC2000V/Min

#### MATERIAL

Housing : PA 66 UL94V-0  
Terminal : Brass 0.8t, Tin plated  
Screws : M4 Steel, Nickel Plated

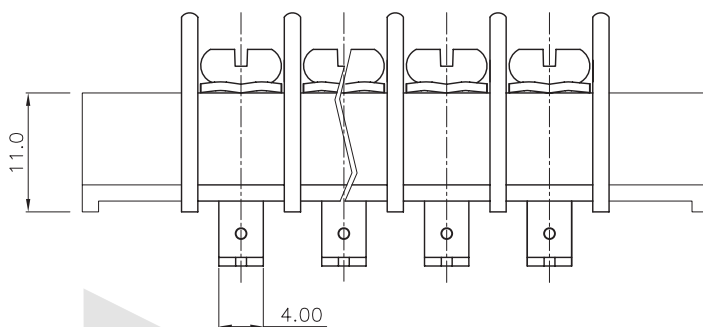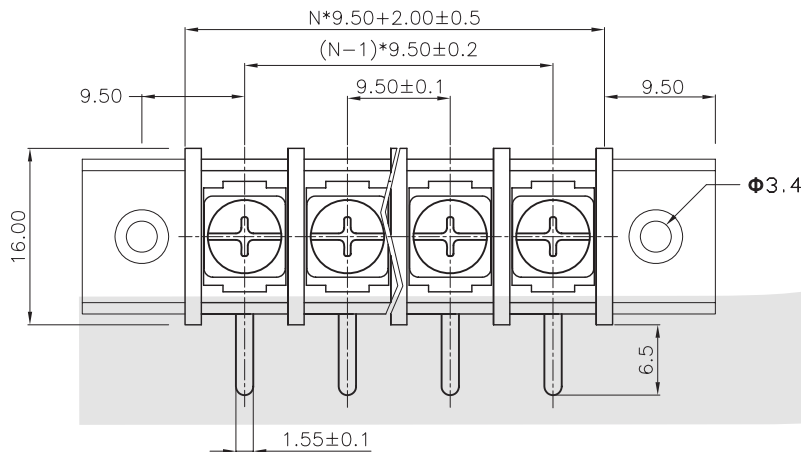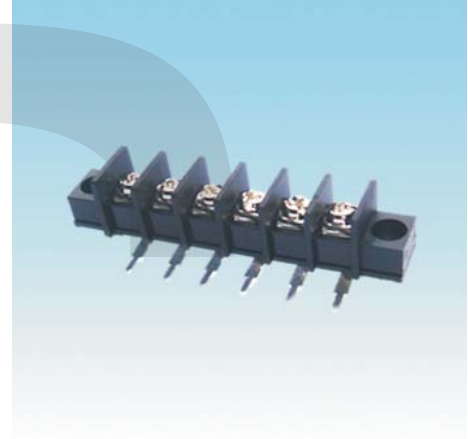

## ORDER INFORMATION

Product NO.: KLS2-45R-9.50 XXP A

Pos. NO.

Series No.

Pitch 9.50=9.50mm

A=Mount Ends B=Barrier Ends

Pin Number

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information