НАНОЭЛЕКТРОНИКО
www.nanoelec.ru

D-SUB Series

KLS1-215 D-SUB 2 ROW SOLDER RIGHT ANGLE 8.1 TYPE

Electrical Specification:
Current Rating: 2 AMP
Insulator Resistance: 5000M ohms min. at DC 500V
Contact Resistance: 20m ohms max. at DC 100mA
Operating Temperature: -55ºC~+105ºC

Material:
Housing: 30% Glass filled PBT UL94V-0
Contacts: Phosphor Bronze
Shell: Steel, 100u" Tin Over 50u" min Nickel
Clinch Nut: Brass, 100u" min Nickel Plated
Screwlock: Brass, 100u" min Nickel Plated

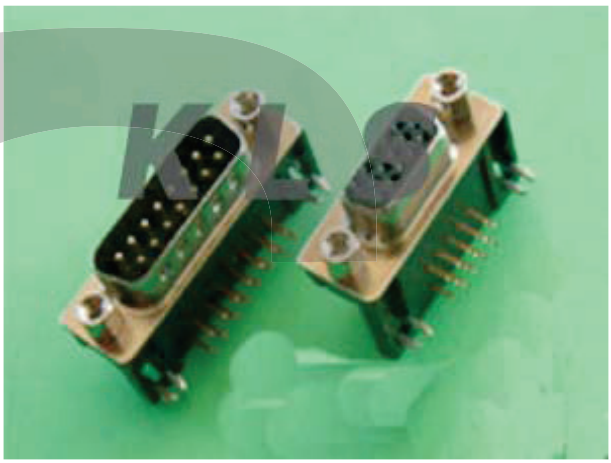

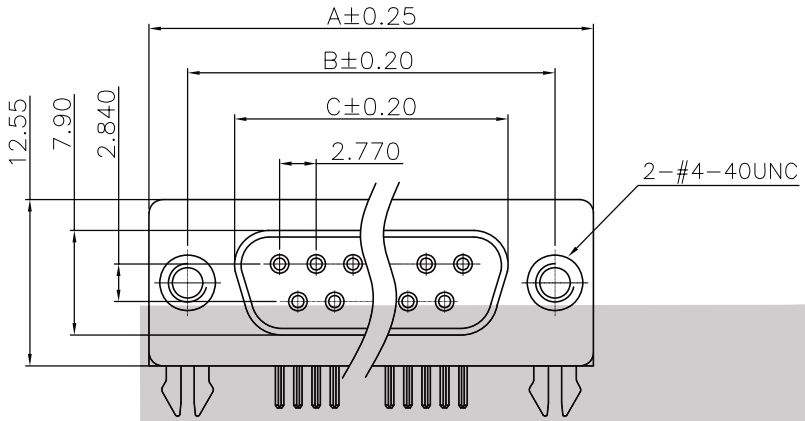



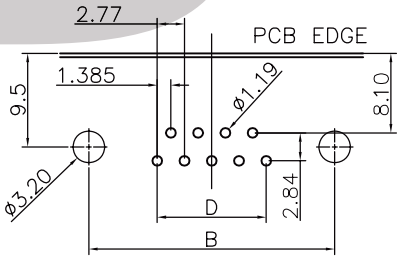

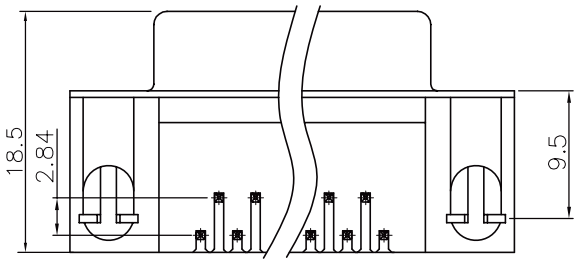

SHELL SIZE	Dim A±0.38	Dim B±0.25	Dim C±0.20
09 pin	30.80	24.99	16.33
15 pin	39.10	33.32	24.66
25 pin	53.00	47.04	38.38
37 pin	69.32	63.50	54.84

ORDER INFORMATION

Product NO.: KLS1-215-XX -F -L

- Pos. NO. 001=001 pos.
- Contact Number of Row 215=DR Series
- Number of Contacts
- L=Blue B=Black
- M=Male F=Female