

Connector

KLS electronic
www.cnkls.com

D-SUB Series



KLS1-215 D-SUB 2 ROW SOLDER RIGHT ANGLE 8.1 TYPE

Electrical Specification:

Current Rating: 2 AMP
Insulator Resistance: 5000M ohms min. at DC 500V
Contact Resistance: 20m ohms max. at DC 100mA
Operating Temperature: -55°C~+105°C

Material:

Housing: 30% Glass filled PBT UL94V-0
Contacts: Phosphor Bronze
Shell: Steel, 100u" Tin Over 50u" min Nickel
Clinch Nut: Brass, 100u" min Nickel Plated
Screwlock: Brass, 100u" min Nickel Plated

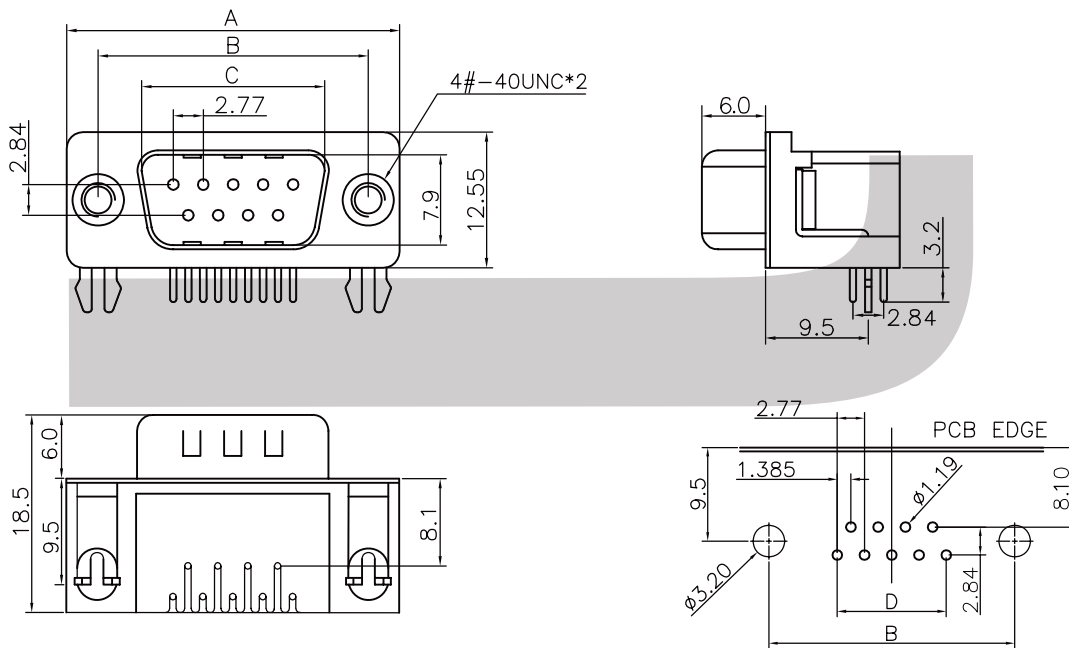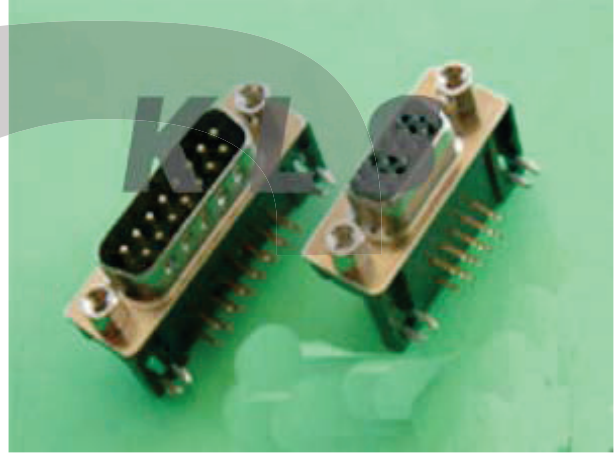

SHELL SIZE	Dim A ± 0.20	Dim B ± 0.25	Dim C ± 0.38	Dim D
09 pin	30.80	24.99	16.92	11.08
15 pin	39.10	33.32	25.25	19.39
25 pin	53.00	47.04	38.96	33.24
37 pin	69.32	63.50	55.42	49.86

ORDER INFORMATION

Product NO.: KLS1-215-XX -M -L

Pos. NO.

001=001 pos.

Contact Number of Row
215=DR Series

Number of Contacts

L=Blue B=Black

M=Male F=Female