

Connector

KLS electronic
www.cnkls.com

D-SUB Series





KLS1-221 D-SUB 2 ROW DIP STRAIGHT TYPE

Electrical Specification:

Current Rating: 2 AMP
Insulator Resistance: 5000M ohms min. at DC 500V
Contact Resistance: 20m ohms max. at DC 100mA
Operating Temperature: -55°C~+105°C

Material:

Housing: 30% Glass filled PBT UL94V-0
Contacts: Phosphor Bronze
Shell: Steel, 100u" Tin Over 50u" min Nickel
Clinch Nut: Brass, 100u" min Nickel Plated
Screwlock: Brass, 100u" min Nickel Plated

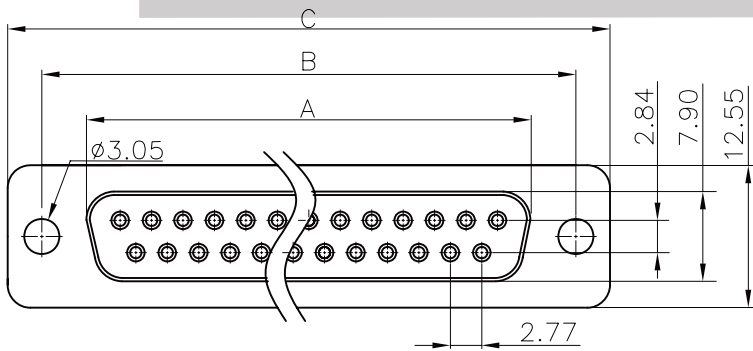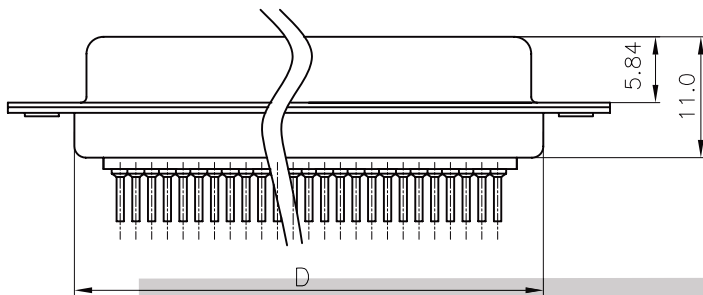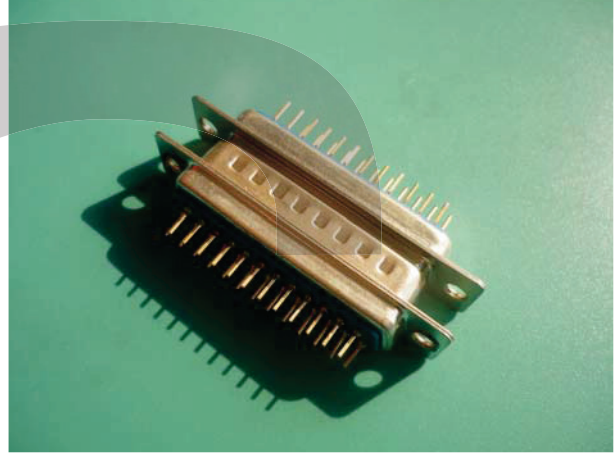

50F	52.34	61.11	66.90	55.30
37F	54.84	63.50	69.32	57.71
25F	38.38	47.04	53.04	41.30
23F	35.18	44.36	50.30	38.15
19F	29.92	39.03	44.80	33.02
15F	24.66	33.32	39.14	27.51
09F	16.33	24.99	30.81	19.28
PIN NO:	A±0.20	B±0.10	C±0.20	D±0.20

ORDER INFORMATION

Product NO.: KLS1-221-XX - F -L

Pos. NO.

001=001 pos.

Contact Number of Row
221=DP Series

Number of Contacts

L=Blue B=Black W=White

M=Male F=Female