

Switch



KLSelectronic
 www.cnkls.com

Tact Switch Series



KLS7-TS4502 4.5x4.5 Tact Switch Series

ELECTRICAL

1. Rating: 50mA 12VDC
2. Contact Resistance : 50mΩ max(initial)
3. Insulation Resistance: 100MΩ(minDC 250V)
4. Dielectric Strength : AC250V(50/60Hz for 1minute)
5. Electrically Life: 100000cycles
6. Environment temperature: -20°C~+70°C
7. Operating Force: 180/250(±30gf)
8. Seal temperature: 260°C~ 280°C

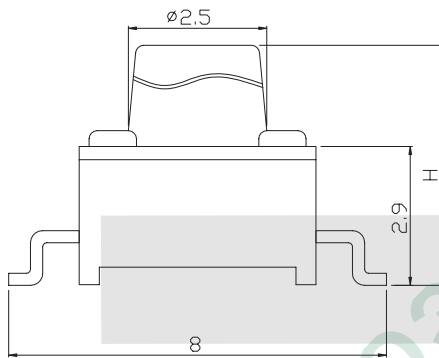

H
3.8
4.8
7.0
8.5

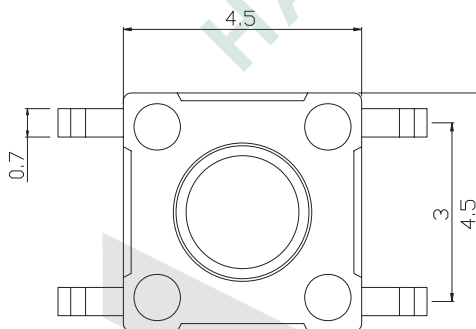

PCB LAYOUT

ORDER INFORMATION

KLS7-TS4502 - H1 - 180 -B

Series No. _____ Packing: B=Bulk T=Tape
 Height: 3.8mm / 4.8mm / 7.0mm / 8.5mm _____ Operating Force : 180~250gf

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information