


标记	版本	文件编号	变更 前	变更 后	日期	更改人
	A		/	新版图	2011.4.19	

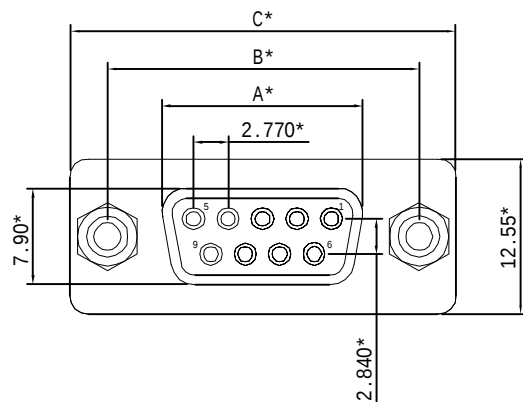

PIN	A	B	C
9	16.33	24.99	30.81
15	24.66	33.32	39.14
25	38.38	47.04	53.04
37	54.84	63.50	69.32

Electrical Characteristics:

- 1.Current Rating: 5 AMP
- 2.Withstanding Voltage: AC 500V for 1 Minute.
- 3.Insulation Resistance: 1000MW Min. at DC 500v.
- 4.Contact Resistance: 15mΩ Max.
- 5.Operating Temperature: -40° c to 105° c.

Material:





- 1.Insulator: PBT+30% Glass Fiber(UL94v-0).
- 2.Contact:Brass
- 3.Contact plated:Gold Flash over Tin or Gold Plated or Tin Plated
- 4.Shell:Steel Nickel Plated

Specification:

- (1) Lnsertion: 9P/9S≤4.0kgf 15P/15S≤4.5kgf 25P/25S≤6.0kgf 37P/37S≤8.0kgf
- (2) Withdraw: 9P/9S≥1.8kgf 15P/15S≥2.0kgf 25P/25S≥2.5kgf 37P/37S≥3.5kgf

标注“*”为重点管控尺寸


HOW TO ORDER:

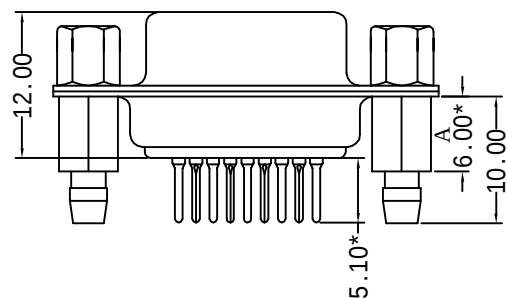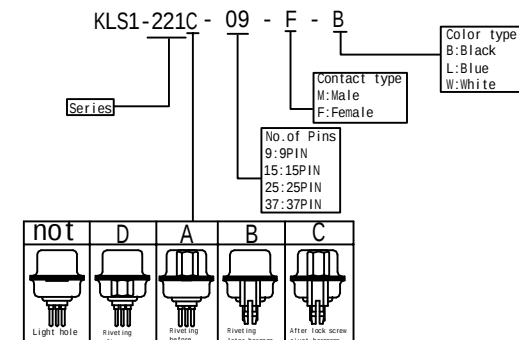

未注公差表
.0±0.25
.00±0.20
.000±0.05

绘图 (DRAWN)	日期 (DATE)	宁波保税区开乐电子有限公司	
	2011.4.19	KLS ELECTRONIC CO.,LTD.	
审核 (CHECKED)	日期 (DATE)	TITLE:	
		DP-XF 铆鱼叉锁螺丝	
核准 (APPROVED)	日期 (DATE)	PART NO.	/
		CLIENT P/N	/
		UNIT: mm	SCALE: free
		FILE NO.:	REV.A

标记	版本	文件编号	变更 前	变更 后	日期	更改人
	A		/	新版图	2011.5.3	

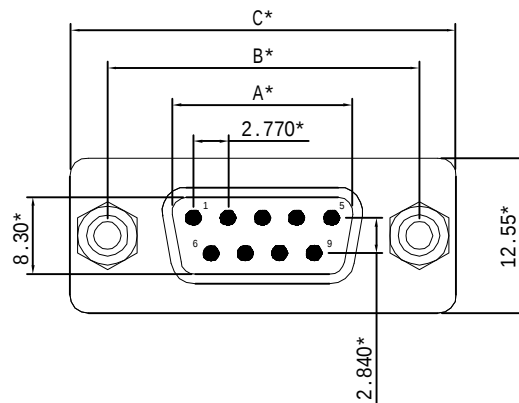

PIN	A	B	C
9	16.92	24.99	30.81
15	25.25	33.32	39.14
25	38.96	47.04	53.04
37	55.42	63.50	69.32

MATERIAL:

1. Insulator: PBT+30%Glass Fiber (UL94V-0)
2. Contact: Brass
3. Contact Plated: Glod Flash over Tin Or Glod Plated Or Tin Plated
4. Shell: Stell, Nickel Plated

SPECIFICATION:





1. Current Rating: 5 AMPS
2. Insulation Resistance: 1000MΩMIN. At 500VDC
3. Dielectric Strength: 500V for One minute
4. Operation Temperature: -55° ~+105° .

Specification:

- (1) Lnsertion: 9P/9S≤4.0kgf
15P/15S≤4.5kgf
25P/25S≤6.0kgf
37P/37S≤8.0kgf
- (2) Withdraw: 9P/9S≥1.8kgf
15P/15S≥2.0kgf
25P/25S≥2.5kgf
37P/37S≥3.5kgf

标注“*”为重点管控尺寸

HOW TO ORDER:

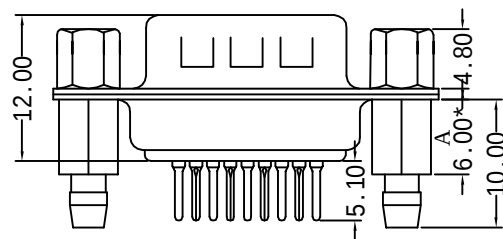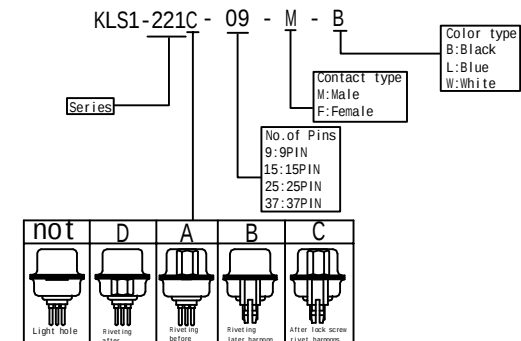

未注公差表
.0±0.25
.00±0.20
.000±0.05

绘图 (DRAWN)	日期 (DATE) 2011.5.3	宁波保税区开乐电子有限公司 KLS ELECTRONIC CO., LTD.	
审核 (CHECKED)	日期 (DATE)	TITLE: DP-XM 铆后鱼叉锁螺丝	
核准 (APPROVED)	日期 (DATE)	PART NO.	/
		CLIENT P/N	/
		UNIT: mm	SCALE: free
		FILE NO.:	REV.A