

Connector

KLS electronic
www.cnkls.com

D-SUB Series




KLS1-315 D-SUB 3 ROW H.D. RIGHT ANGLE 8.89 TYPE

Electrical Specification:

Current Rating: 2 AMP
Insulator Resistance: 5000M ohms min. at DC 500V
Contact Resistance: 20m ohms max. at DC 100mA
Operating Temperature: -55°C~+105°C

Material:

Housing: 30% Glass filled PBT UL94V-0
Contacts: Phosphor Bronze
Shell: Steel, 100u" Tin Over 50u" min Nickel
Clinch Nut: Brass, 100u" min Nickel Plated
Screwlock: Brass, 100u" min Nickel Plated

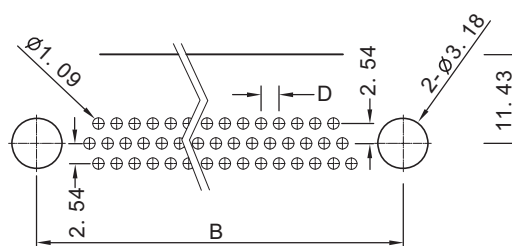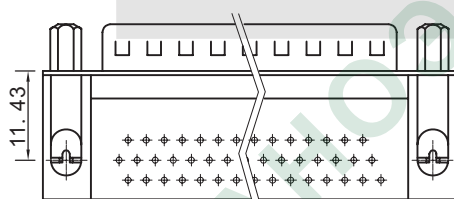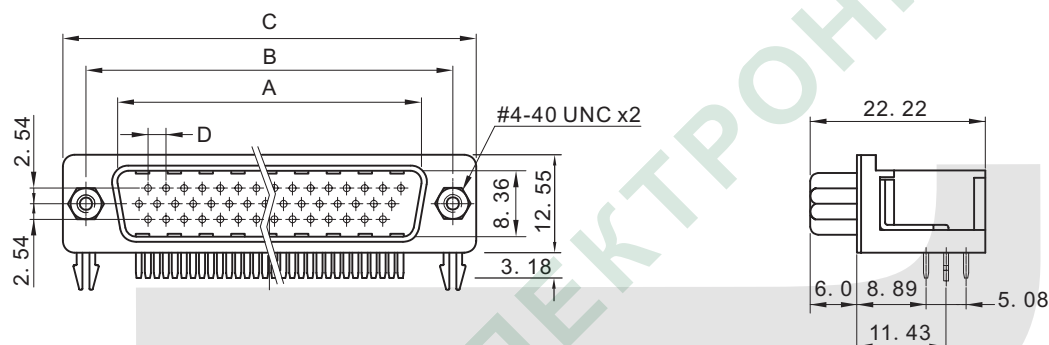

P. C. B. LAYOUT

PIN NO.	A±0.1	B±0.13	C±0.38	D±0.005
15	16.92	24.99	30.81	2.29
26	25.25	33.32	39.14	2.29
44	38.96	47.04	53.04	2.29
62	55.42	63.50	69.32	2.41

ORDER INFORMATION

Product NO.: KLS1-315-XX -M -L

Pos. NO. 001=001 pos.
Contact Number of Row 315=HDR Series
Number of Contacts
L=Blue B=Black
M=Male F=Female

Connector

KLS electronic
www.cnkls.com

D-SUB Series


KLS1-315 D-SUB 3 ROW H.D. RIGHT ANGLE 8.89 TYPE

Electrical Specification:

Current Rating: 2 AMP
Insulator Resistance: 5000M ohms min. at DC 500V
Contact Resistance: 20m ohms max. at DC 100mA
Operating Temperature: -55°C~+105°C

Material:

Housing: 30% Glass filled PBT UL94V-0
Contacts: Phosphor Bronze
Shell: Steel, 100u" Tin Over 50u" min Nickel
Clinch Nut: Brass, 100u" min Nickel Plated
Screwlock: Brass, 100u" min Nickel Plated

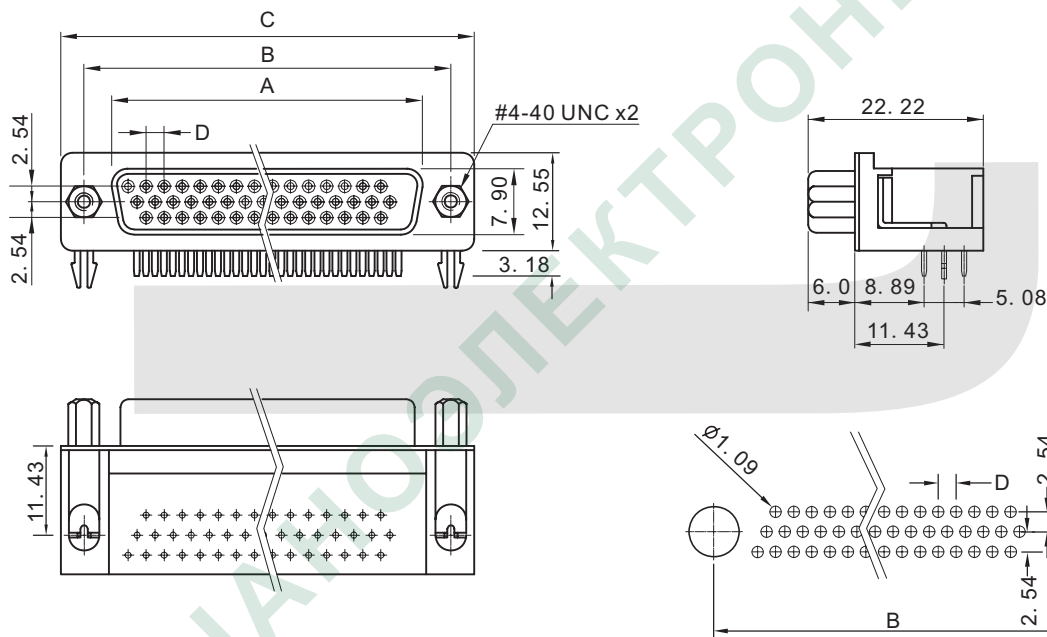

PIN NO.	A±0.1	B±0.13	C±0.38	D±0.1
15	16.33	24.99	30.81	2.29
26	24.66	33.32	39.14	2.29
44	38.38	47.04	53.04	2.29
62	55.84	63.50	69.32	2.41

P. C. B. LAYOUT

ORDER INFORMATION

Product NO.: KLS1-315-XX -F -L

Pos. NO. 001=001 pos.
Contact Number of Row 315=HDR Series
Number of Contacts L=Blue B=Black
M=Male F=Female