

Connector

KLS electronic
www.cnkls.com

D-SUB Series

KLS1-415 D-SUB 3 ROW SOLDER RIGHT ANGLE 3.08mm TYPE





I

Electrical Specification:

Current Rating: 2 AMP
Insulator Resistance: 5000M ohms min. at DC 500V
Contact Resistance: 20m ohms max. at DC 100mA
Operating Temperature: -55°C~+105°C

Material:

Housing: 30% Glass filled PBT UL94V-0
Contacts: Phosphor Bronze
Shell: Steel, 100u" Tin Over 50u" min Nickel
Clinch Nut: Brass, 100u" min Nickel Plated
Screwlock: Brass, 100u" min Nickel Plated

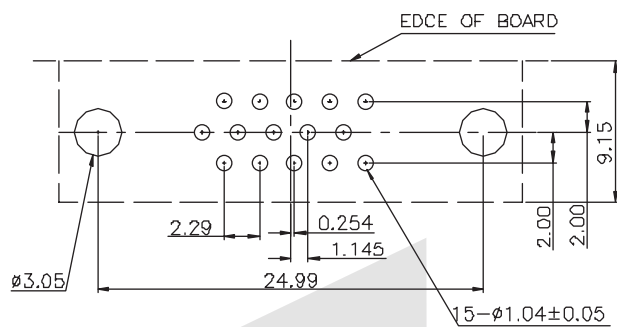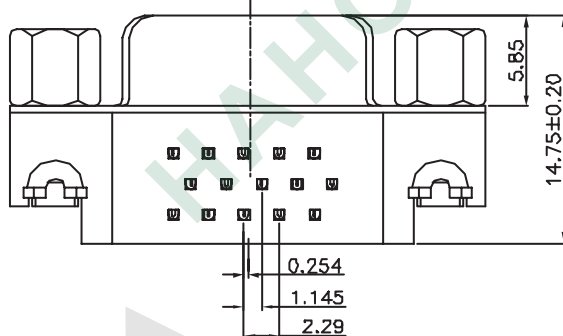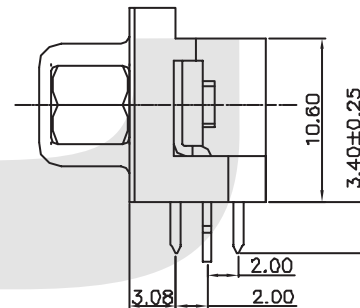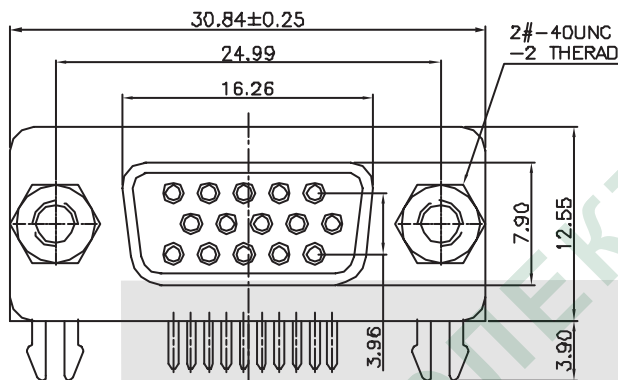

RECOMMENDED P.C.B. LAYOUT

ORDER INFORMATION

Product NO.: KLS1-415-XX -F -L

Pos. NO. 001=001 pos.
Contact Number of Row 415=HDR Series
Number of Contacts: XX=15Pin
L=Blue B=Black
F=Female