

Connector

KLS electronic
www.cnkls.com

D-SUB Series


KLS1-515 D-SUB 2 ROW SOLDER RIGHT ANGLE 9.4mm TYPE

Electrical Specification:

Current Rating: 2 AMP
Insulator Resistance: 5000M ohms min. at DC 500V
Contact Resistance: 20m ohms max. at DC 100mA
Operating Temperature: -55°C~+105°C

Material:

Housing: 30% Glass filled PBT UL94V-0
Contacts: Phosphor Bronze
Shell: Steel, 100u" Tin Over 50u" min Nickel
Clinch Nut: Brass, 100u" min Nickel Plated
Screwlock: Brass, 100u" min Nickel Plated

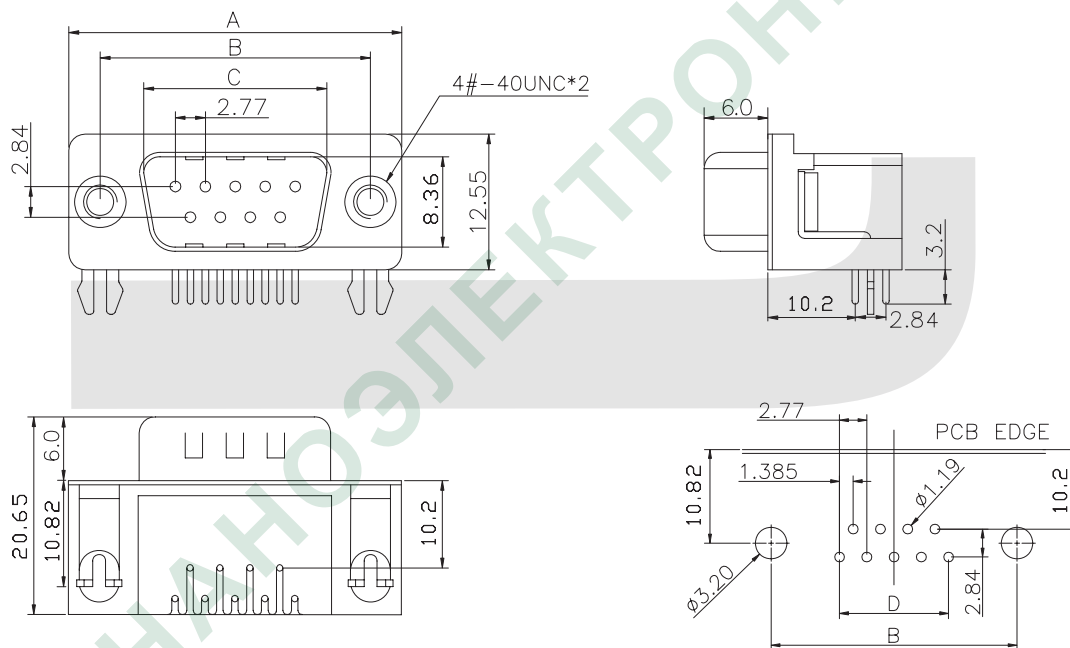

SHELL SIZE	Dim A ± 0.20	Dim B ± 0.25	Dim C ± 0.38	Dim D
09 pin	30.80	24.99	16.92	11.08
15 pin	39.10	33.32	25.25	19.39
25 pin	53.00	47.04	38.96	33.24
37 pin	69.32	63.50	55.42	49.86

ORDER INFORMATION

Product NO.: KLS1-515-XX -M -L

Pos. NO. _____ L=Blue B=Black
001=001 pos. _____
Contact Number of Row _____
515=2 Row Solder Right Angle 9.4mm Type _____
Number of Contacts _____ M=Male F=Female

Connector

KLS electronic
www.cnkls.com

D-SUB Series


KLS1-515 D-SUB 2 ROW SOLDER RIGHT ANGLE 9.4mm TYPE

Electrical Specification:

Current Rating: 2 AMP
Insulator Resistance: 5000M ohms min. at DC 500V
Contact Resistance: 20m ohms max. at DC 100mA
Operating Temperature: -55°C~+105°C

Material:

Housing: 30% Glass filled PBT UL94V-0
Contacts: Phosphor Bronze
Shell: Steel, 100u" Tin Over 50u" min Nickel
Clinch Nut: Brass, 100u" min Nickel Plated
Screwlock: Brass, 100u" min Nickel Plated

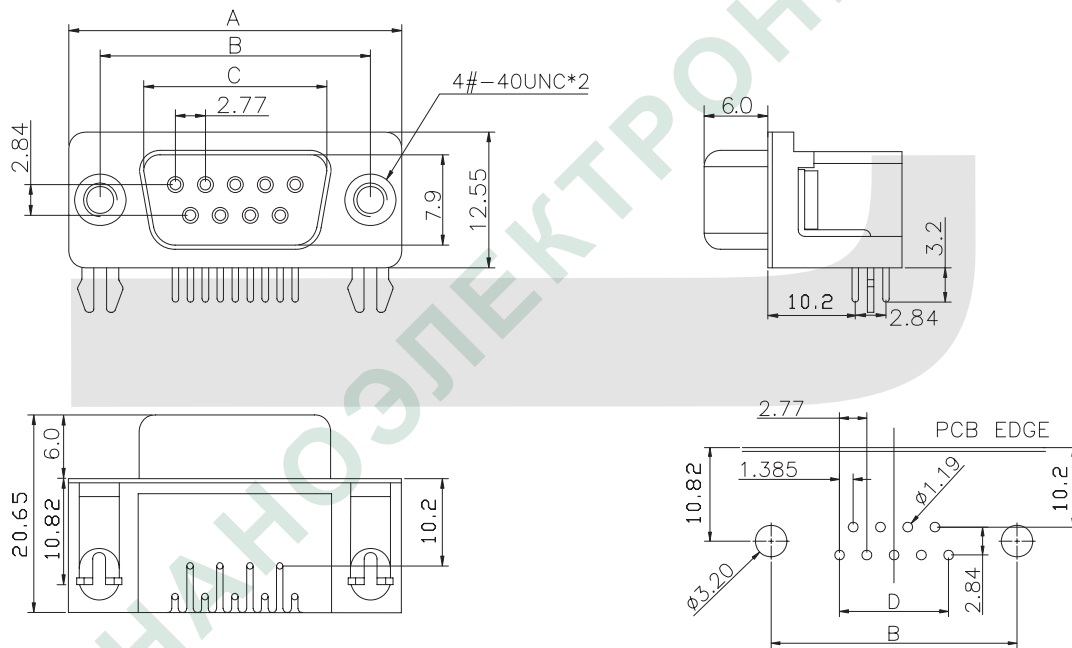

SHELL SIZE	Dim A ± 0.20	Dim B ± 0.25	Dim C ± 0.38	Dim D
09 pin	30.80	24.99	16.92	11.08
15 pin	39.10	33.32	25.25	19.39
25 pin	53.00	47.04	38.96	33.24
37 pin	69.32	63.50	55.42	49.86

ORDER INFORMATION

Product NO.: KLS1-515-XX - F -L

Pos. NO. _____ L=Blue B=Black
001=001 pos. _____
Contact Number of Row _____
515=2 Row Solder Right Angle 9.4mm Type _____
Number of Contacts _____ M=Male F=Female