

## TERMINAL BLOCK Connector

**KLS** electronic  
www.cnkls.com

### Pluggable Series

KLS2-EDALV-3.50/3.81 Series Pitch=3.50mm/3.81mm

#### Electrical :


Rated voltage: 300V  
Rated current: 8A  
Contact resistance: 20mΩ  
Insulation resistance: 5000MΩ/1000V  
Withstanding Voltage: AC2000V/1Min

#### Material

Pin header: Brass, Tin plated  
Housing: PA66, UL94V-0

#### Mechanical

Temp. Range: -40°C~+105°C  
MAX Soldering: +250°C for 5 Sec

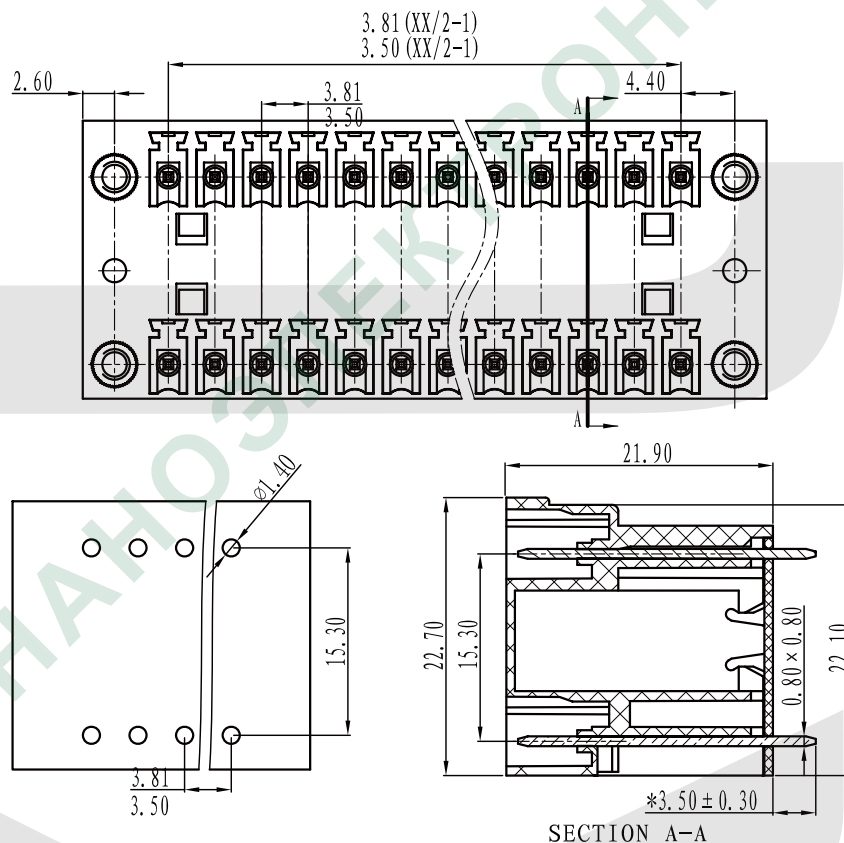

### ORDER INFORMATION

Product NO.: KLS2-EDALV-3.50-XXP X X

Pos. NO.

Series No.

Pitch: 3.50=3.50mm 3.81=3.81mm

Number of Pole

Customer Request

Color: 1=Gray 2=Blue 3=Black  
4=Green 5=Orange 6=Red  
7=Transparent 8=Yellow 9=White

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information