

TERMINAL BLOCK Connector

KLS electronic
www.cnkls.com

Pluggable Series

KLS2-EDAR-3.50/3.81 Series Pitch=3.50mm/3.81mm

Electrical :




Rated voltage: 300V
Rated current: 8A
Contact resistance: 20mΩ
Insulation resistance: 5000MΩ/1000V
Withstanding Voltage: AC1500V/1Min

Material

Housing: PA66, UL94V-0
Pin header: Brass, Tin plated

Mechanical

Temp. Range: -40°C~+105°C
MAX Soldering: +250°C for 5 Sec

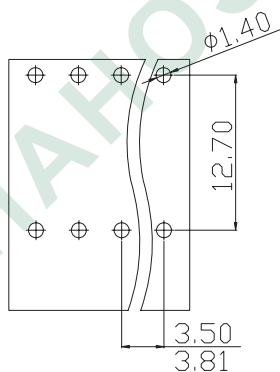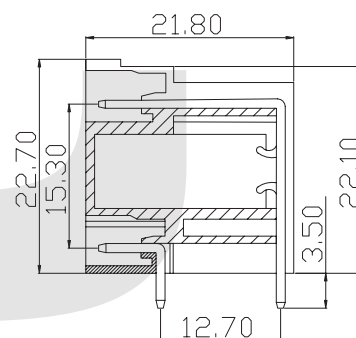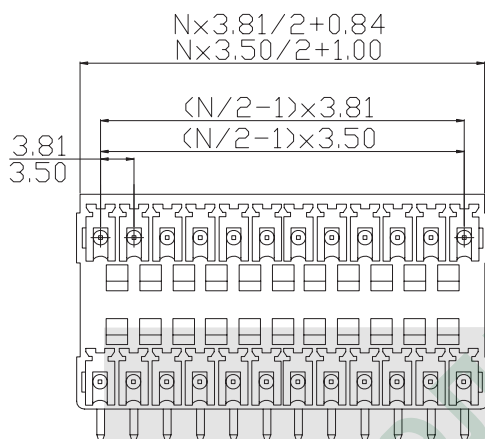

PCB LAYOUT

ORDER INFORMATION

Product NO.: KLS2-EDAR-3.50-XXP X X

Pos. NO.

Series No.

Pitch: 3.50=3.50mm 3.81=3.81mm

Number of Pole

Customer Request

Color: 1=Gray
4=Green
7=Transparent

2=Blue
5=Orange
8=Yellow

3=Black
6=Red
9=White

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information