

# TERMINAL BLOCK Connector

**KLS**electronic  
www.cnkls.com

II

## Pluggable Series

KLS2-EDGKD-3.50/3.81 Series Pitch=3.50mm/3.81mm

### Electrical :


Rated voltage: 300V  
Rated current: 8A  
Contact resistance: 20mΩ  
Insulation resistance: 5000MΩ/1000V  
Withstanding Voltage: AC2000V/1Min

### Material

Housing: PA66, UL94V-0  
Contact: Phosphor Bronze, Ni plated, Stainless steel

### Mechanical

Temp. Range: -40°C~+105°C  
Wire range: 28-16AWG 1.5mm<sup>2</sup>  
Strip length: 7-8mm

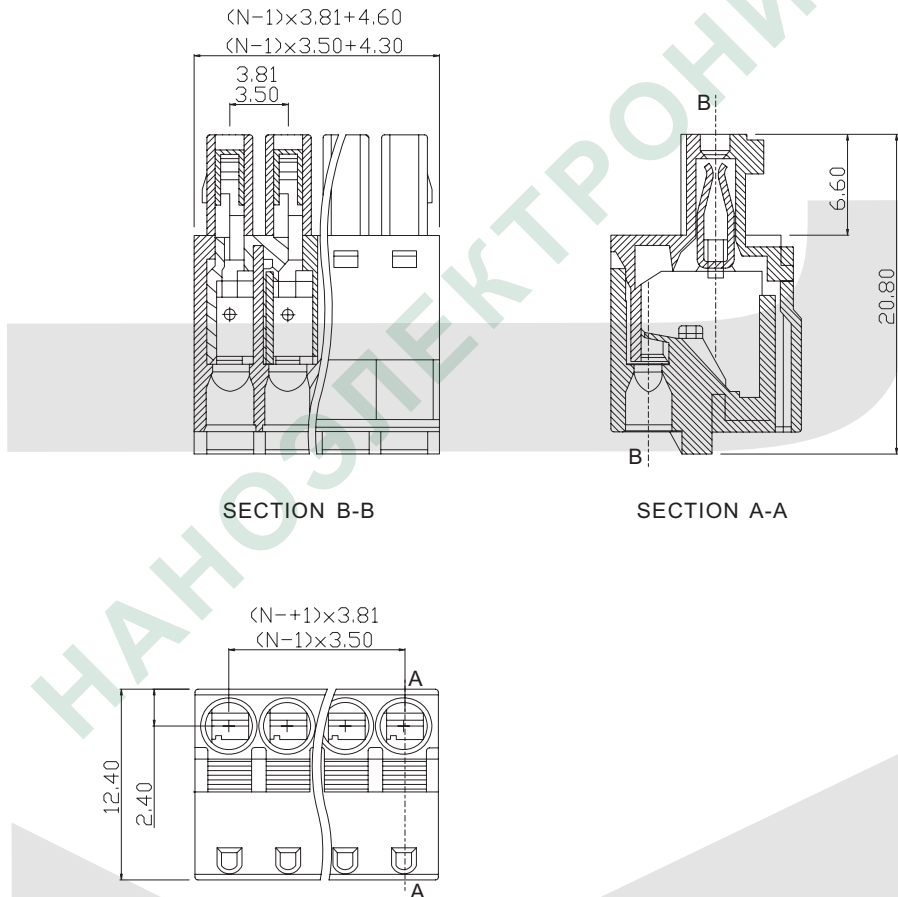

## ORDER INFORMATION

Product NO.: KLS2-EDGKD-3.50-XXP X X

Pos. NO.	_____	Customer Request	_____
Series No.	_____	Color: 1=Gray	2=Blue 3=Black
Pitch: 3.50=3.50mm	3.81=3.81mm	4=Green	5=Orange 6=Red
Number of Pole	_____	7=Transparent	8=Yellow 9=White