

TERMINAL BLOCK Connector

KLSelectronic
www.cnkls.com

Pluggable Series

KLS2-EDK-5.00/5.08 Series Pitch=5.00mm/5.08mm

Electrical :


Rated voltage: 300V
Rated current: 15A
Contact resistance: 20mΩ
Insulation resistance: 5000MΩ/DC1000V
Withstanding Voltage: AC2000V/1Min
Wire range: 28-12AWG 2.5mm²

Material

Contact: Phosphor bronze
Screws: M2.5, steel, Zinc plated
Housing: PA66, UL94V-0

Mechanical

Temp. Range: -40°C~+105°C
Torque: 0.4Nm(3.6Lb.in)
Strip length: 7-8mm

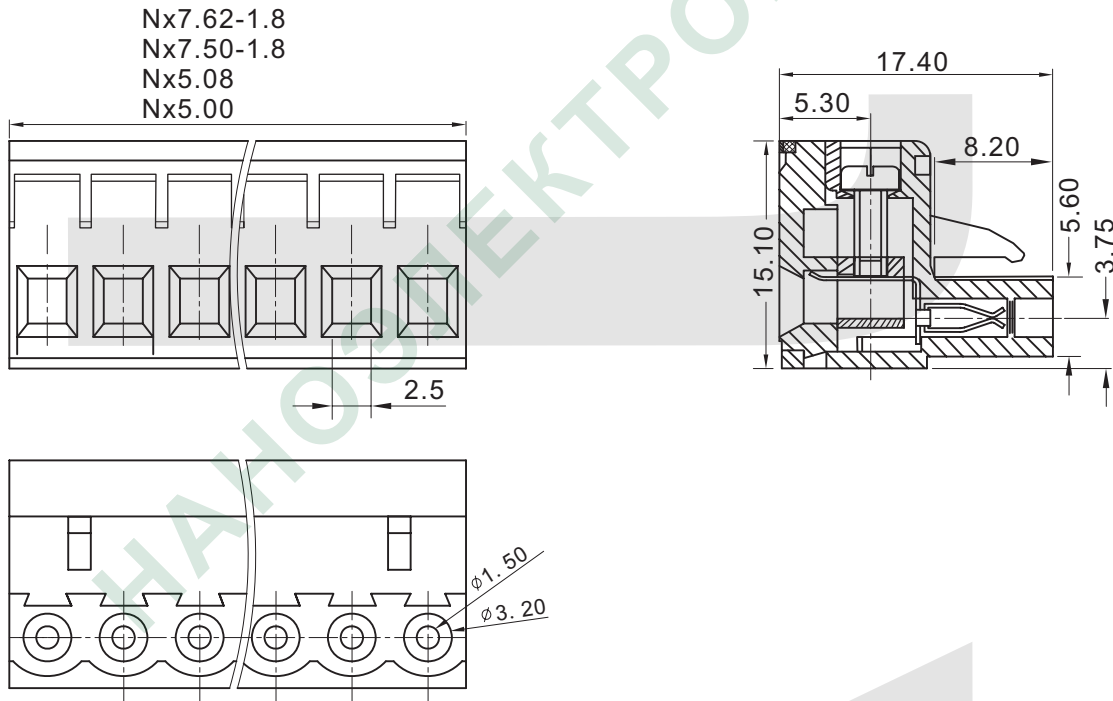

ORDER INFORMATION

Product NO.: KLS2-EDK-5.00-XXP X X X

Pos. NO.	Series No.	Pitch 5.00=5.00mm 7.50=7.50mm	5.08=5.08mm 7.62=7.62mm	Customer Request	Screw: C=Cross Screw S=Slot Screw	Color: 1=Gray 4=Green 7=Transparent	2=Blue 5=Orange 8=Yellow	3=Black 6=Red 9=White
----------	------------	----------------------------------	----------------------------	------------------	--------------------------------------	---	--------------------------------	-----------------------------