

TERMINAL BLOCK Connector

KLSelectronic
www.cnkls.com

Pluggable Series

KLS2-EDR-3.81/EDR-3.50 Series Pitch=3.50mm/3.81mm

Electrical :


Rated voltage: 300V
Rated current: 8A
Contact resistance: 20mΩ
Insulation resistance: 5000MΩ/1000V
Withstanding Voltage: AC1500V/1Min
Wire range: 18AWG 1mm²

Material

Contact: Phosphor bronze
Pin header: Brass, Tin plated
Housing: PA66, UL94V-0

Mechanical

Temp. Range: -40°C~+105°C
MAX Soldering: +250°C for 5 Sec.
Strip length: 5-6mm

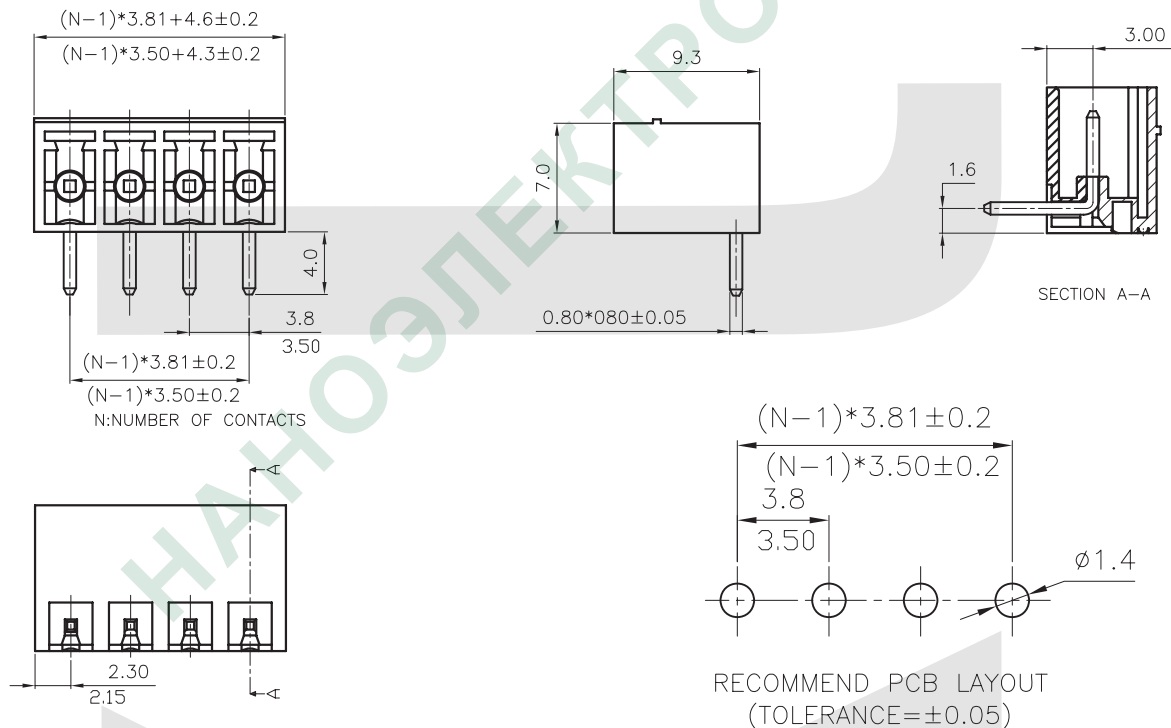

ORDER INFORMATION

Product NO.: KLS2-EDR-3.50-XXP X X

Pos. NO.

Series No.

Pitch: 3.50=3.50mm
3.81=3.81mm

Number of Pole

Customer Request

Color: 1=Gray 2=Blue 3=Black
4=Green 5=Orange 6=Red
7=Transparent 8=Yellow 9=White

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information